

# Кольцевые изолированные наконечники

поперечное сечение провода 0.5~1.5mm² I<sub>max</sub>=19A




Тип	Резьба, (дюйм)	Резьба d2 (мм)	Размеры (мм)					Цвет
			B	L	F	H	Dφ	
RV 1.25-3	#4	3.2	5.7	17.8	4.95	10.0	4.3	Красный
RVS 1.25-3.5	#6	3.7	5.7	17.8	4.95			
RVM 1.25-3.5	#6	3.7	6.6	20.1	6.3			
RVL 1.25-3.5	#6	3.7	7.2	21.2	7.0			
RVS 1.25-4	#8	4.3	6.6	20.1	6.3			
RVL 1.25-4	#8	4.3	8.0	21.5	7.0			
RVS 1.25-5	#10	5.3	8.0	21.5	7.0			
RVL 1.25-5	#10	5.3	9.5	23.3	8.0			
RVLL 1.25-5	#10	5.3	11.6	27.5	11.1			
RV 1.25-6	1/4	6.5	11.6	27.5	11.1			
RV 1.25-8	5/16	8.4	11.6	27.5	11.1			
RV 1.25-10	3/18	10.5	13.6	31.6	13.9			
RV 1.25-12	1/2	13.0	19.2	35.0	16.0			

поперечное сечение провода 1.5~2.5mm² I<sub>max</sub>=27A

Тип	Резьба, (дюйм)	Резьба d2 (мм)	Размеры (мм)					Цвет
			B	L	F	H	Dφ	
RV 2-3	#4	3.2	6.6	17.8	4.3	10.0	4.9	Синий
RVS 2-3.5	#6	3.7	6.6	17.8	4.3			
RVM 2-3.5	#6	3.7	6.6	21.0	7.0			
RVL 2-3.5	#6	3.7	8.5	22.5	7.75			
RVS 2-4	#8	4.3	6.6	21.0	7.0			
RVL 2-4	#8	4.3	8.5	22.5	7.75			
RVS 2-5	#10	5.3	8.5	22.5	7.75			
RVL 2-5	#10	5.3	9.5	22.5	7.25			
RV 2-6	1/4	6.5	12.0	27.6	11.0			
RV 2-8	5/16	8.4	12.0	27.6	11.0			
RV 2-10	3/18	10.5	13.6	30.2	13.9			
RV 2-12	1/2	13.0	18.0	34.2	16.0			

поперечное сечение провода 2.5~4mm² I<sub>max</sub>=37A

Тип	Резьба, (дюйм)	Резьба d2 (мм)	Размеры (мм)					Цвет
			B	L	F	H	Dφ	
RV 3.5-4	#8	4.3	8.0	24.5	7.7	12.5	6.2	Черный
RVS 3.5-5	#10	5.3	8.0	24.5	7.7			
RVL 3.5-5	#10	5.3	12.0	27.9	7.7			
RV 3.5-6	1/4	6.5	12.0	27.9	7.7			
RV 3.5-8	5/16	8.4	15.0	32.0	13.5			
RV 3.5-10	3/8	10.5	15.0	32.0	13.5			

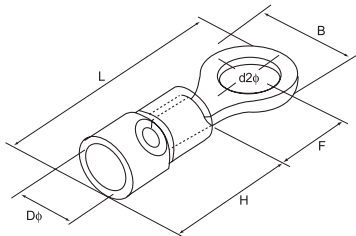

поперечное сечение провода 4~6mm² I<sub>max</sub>=48A

Тип	Резьба, (дюйм)	Резьба d2 (мм)	Размеры (мм)					Цвет
			B	L	F	H	Dφ	
RV 5.5-3.5	#6	3.7	7.2	21.4	5.9	12.5	6.7	Жёлтый
RVS 5.5-4	#8	4.3	7.2	21.4	5.9			
RVL 5.5-4	#8	4.3	9.5	25.5	8.3			
RV 5.5-5	#10	5.3	9.5	25.5	8.3			
RV 5.5-6	1/4	6.5	12.0	31.5	13.0			
RV 5.5-8	5/16	8.4	15.0	33.7	13.7			
RV 5.5-10	3/18	10.5	15.0	33.7	13.7			
RV 5.5-12	1/2	13.0	19.2	38.1	16.0			