




The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of any part of this information in any format or manner, CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1 2 3 4 5 6 7 8

Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QF	1
3	CONTACT
2	COVER
1	HOUSING
ITEM	PART NAME
	MATERILAS
	FINISHED

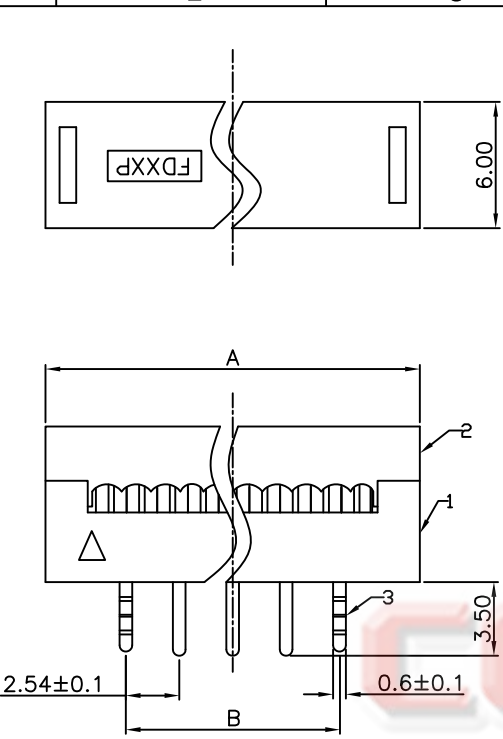

Position	Dim.		TOL.	
	A	B		
06	12.92	5.08	±0.30	±0.25
08	15.46	7.62		
10	18.00	10.16		
12	20.54	12.70		
14	23.08	15.24	±0.35	±0.35
16	25.62	17.78		
20	30.70	22.86		
26	38.32	30.48		
30	43.40	35.56	±0.35	±0.35
34	48.48	40.64		
40	56.10	48.26		
50	68.80	60.96		
60	81.50	73.66	±0.35	±0.35
64	86.58	78.74		

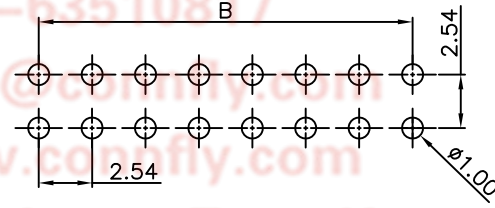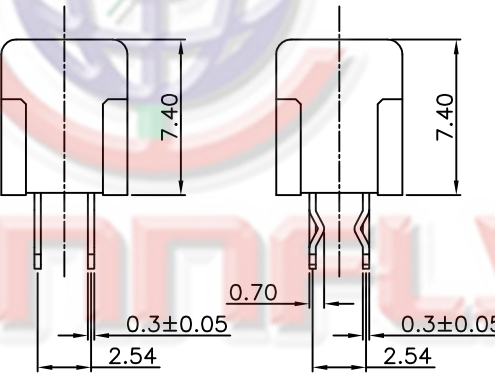

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 09/21/05'		LJC 09/21/05'
C	ADD CONTACTS TYPE	JLZ 09/25/14'		LJC 09/25/14'
E	DRAWING UPDATE	JLZ 10/26/17'	HZW 10/26/17'	LJC 10/26/17'
F	DRAWING UPDATE	JLZ 08/28/18'		

- NOTES:
- MATERIAL
    - INSULATOR:THERMOPLASTIC(UL 94V-0).
    - CONTACT: COPPER ALLOY.
  - SPECIFICATION
    - TEMPERATURE:-40°C~+105°C.
    - CONTACT RESISTANCE:20mΩ max.
    - INSULATION RESISTANCE:1000MΩ min.
    - DIELECTRIC WITHSTANDING VOLTAGE:AC 500V PER MINUTE.
  - PRODUCT NUMBER CODE:
 

DS1018- X X X X - X

    - Packing Type(Tray)
      - 2:One TRD+One TRU
      - N/A:Many TRD+One TRU
    - Kink support
      - S: W/ Kink
      - X: W/O Kink
    - Housing Color
      - B: Black
      - A: Gray
    - CONTACT PLATING
      - 8: FULL GOLD FLASH
      - 2: Gold + Nickel
      - 6: TIN
    - No. OF CONTACTS
      - 06 08 10 12 14 16 20
      - 26 30 34 40 50 60 64

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION		TITLE	DIP PLUG CONNECTOR PITCH 2.54mm
UNITS	mm	SHEET SIZE	A4
SHEET SIZE	A4	SERIES	DS1018 SERIES

晨翔电子有限公司  
CONNFLY CONNELY ELECTRONIC CO. LTD

DRAWING TYPE	CUSTOMER
SCALE	1:1
DRAWING NO.	C-DS1018-XXXXX-F

1 2 3 4 5 6 7 8