


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 10/09/06	~	LJC 10/09/06
B	增加pin数方向	LL 12/21/06	~	LJC 12/21/06
C	ADD P/N CODE	JLZ 01/30/15'	HZW 01/30/15'	LJC 01/30/15'
D	DRAWING UPDATE	JLZ 05/04/18'	~	

Female Terminal





T-DS1072- S C 6 0 0

Contact Plating
6: Tin

Female Terminal

Wire Range	O.D of Wire	
Section Area (mm ²)	AWG#	mm
0.2~0.75	24~18	1.3~2.8

Female Housing



I-DS1072- S C T 0 X

No. of contact
02~13

NOTES:



- MAIN SPECIFICATIONS
 - Housing material: NYLON 66
 - Wire range: AWG#24~#18
 - Rated voltage: 250V
 - Rated current: 7A(18AWG)
 - Contact resistance: ≤ 30mΩ
 - Insulation resistance: ≥ 1000MΩ
 - Withstanding voltage: 1000V, AC 1 minute
 - Temperature range: -25 ~ +85°C
 - Recommend PC board thickness: 1.6mm

2. PRODUCT NUMBER CODE:



DS1072 - X X X X X

- Contact Plating
6: Tin
8: Full gold flash
- Housing Color
T: Transparent
- Mounting type
R: Right Angle
V: V/T type
- Connector type
M: Male
- No. of contact
2 to 13

Male Right Angle

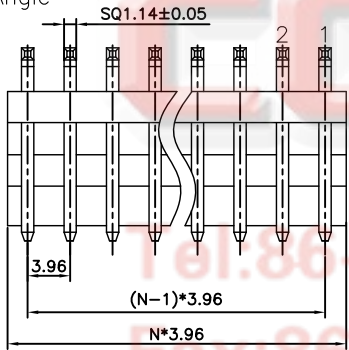

Male V/T TYPE

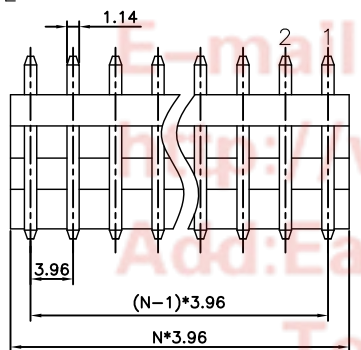


N=No. of contacts

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION	TITLE
UNITS: mm	P.C.B CONNECTOR Pitch 3.96mm
SHEET SIZE: A4	SERIES: DS1072 SERIES

DRAWING TYPE	CUSTOMER
SCALE: 1:1	SHEET: 1 OF 1
DRAWING NO.:	C-DS1072-XXXXX-D


晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD

Tel: 86-574-63508787
 Fax: 86-574-63510817
 E-mail: sales@connfly.com
 Http://www.connfly.com
 Add: East Industry Zone, Kamei
 Town Cixi Ningbo China
 P.C: 315333