



SAW Components

Data Sheet B7851





SAW Components

B7851

Low-Loss Filter for Mobile Communication

1960,0 MHz




Data Sheet



Chip sized SAW package QCS5E

Features

- Low-loss RF filter for mobile telephone PCS systems, receive path
- Low amplitude ripple
- Very low insertion loss
- Usable passband 60 MHz
- Unbalanced to balanced operation
- Impedance transform from 50 Ω to 150 Ω
- Suitable for GPRS class 1 to 12
- Package for **Surface Mount Technology (SMT)**
- Pb-free

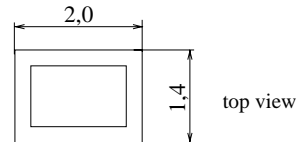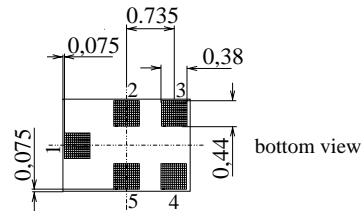


Terminals

- Ni, gold-plated

Dimensions in mm, approx. weight 0,007 g

Pin configuration

- 1 Input, unbalanced
- 3,4 Output, balanced
- 2,5 Case ground

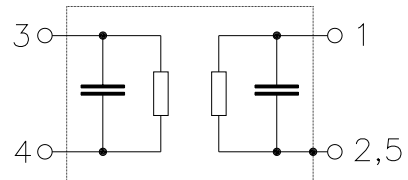

Type	Ordering code	Marking and Package according to	Packing according to
B7851	B39202-B7851-K410	C61157-A7-A131	F61074-V8151-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	- 40 / + 85	°C	machine model, 10 pulses
Storage temperature range	T_{stg}	- 40 / + 85	°C	
ESD voltage	V_{MM}	50	V	
DC voltage	V_{DC}	5	V	
Input Power at				peak power of GSM signal, duty cycle 4:8
GSM850, GSM900	P_{IN}	15	dBm	
GSM1800, GSM1900	P_{IN}	12	dBm	
Tx bands				

* - acc. to JESD22-A115A (Machine Model), 10 negative & 10 positive pulses



SAW Components

B7851

Low-Loss Filter for Mobile Communication

1960,0 MHz

Data Sheet



Characteristics

Operating Temperature Range: $T = 25^{\circ}\text{C}$
 Terminating source impedance: $Z_S = 50\Omega$
 Terminating load impedance: $Z_L = 150\Omega \parallel 16\text{nH}$ (balanced)

			min.	typ.	max.	
Center frequency	f_C		—	1960,0	—	MHz
Maximum insertion attenuation	α_{max}		—	1,4	2,1	dB
		1930,0 ... 1990,0 MHz				
Amplitude ripple (p-p)	$\Delta\alpha$		—	0,5	1,0	dB
		1930,0 ... 1990,0 MHz				
Input VSWR			—	1,7	2,0	
		1930,0 ... 1990,0 MHz				
Output VSWR			—	1,6	2,0	
		1930,0 ... 1990,0 MHz				
Output phase balance ($\phi(S_{31}) - \phi(S_{21}) + 180^{\circ}$)			-10	-2/3	10	degree
		1930,0 ... 1990,0 MHz				
Output amplitude balance (S_{31}/S_{21})			-1,0	-0,5/0,5	1,0	dB
		1930,0 ... 1990,0 MHz				
Attenuation	α					
		0,0 ... 1510,0 MHz	40	43	—	dB
		1510,0 ... 1830,0 MHz	30	35	—	dB
		1830,0 ... 1850,0 MHz	26	30	—	dB
		1850,0 ... 1890,0 MHz	23	28	—	dB
		1890,0 ... 1910,0 MHz	13	18	—	dB
		2010,0 ... 2070,0 MHz	13	15	—	dB
		2070,0 ... 2400,0 MHz	23	26	—	dB
		2400,0 ... 2500,0 MHz	35	48	—	dB
		2500,0 ... 3860,0 MHz	28	35	—	dB
		3860,0 ... 3980,0 MHz	45	54	—	dB
		3980,0 ... 5790,0 MHz	28	48	—	dB
		5790,0 ... 6000,0 MHz	40	58	—	dB



SAW Components	B7851
Low-Loss Filter for Mobile Communication	1960,0 MHz

Data Sheet




Characteristics

Operating Temperature Range: $T = -20$ to $+75^{\circ}\text{C}$
 Terminating source impedance: $Z_S = 50\Omega$
 Terminating load impedance: $Z_L = 150\Omega \parallel 16\text{nH}$ (balanced)


		min.	typ.	max.	
Center frequency	f_C	—	1960,0	—	MHz
Maximum insertion attenuation	α_{max}	—	1,6	2,3	dB
	1930,0 ... 1990,0 MHz				
Amplitude ripple (p-p)	$\Delta\alpha$	—	0,6	1,3	dB
	1930,0 ... 1990,0 MHz				
Input VSWR		—	1,7	2,0	
	1930,0 ... 1990,0 MHz				
Output VSWR		—	1,6	2,0	
	1930,0 ... 1990,0 MHz				
Output phase balance ($\phi(S_{31}) - \phi(S_{21}) + 180^{\circ}$)		-10	-3/5	10	degree
	1930,0 ... 1990,0 MHz				
Output amplitude balance (S_{31}/S_{21})		-1,0	-0,6/0,5	1,0	dB
	1930,0 ... 1990,0 MHz				
Attenuation	α				
	0,0 ... 1510,0 MHz	40	43	—	dB
	1510,0 ... 1830,0 MHz	30	35	—	dB
	1830,0 ... 1850,0 MHz	26	30	—	dB
	1850,0 ... 1890,0 MHz	23	28	—	dB
	1890,0 ... 1910,0 MHz	12	18	—	dB
	2010,0 ... 2070,0 MHz	13	15	—	dB
	2070,0 ... 2400,0 MHz	22	25	—	dB
	2400,0 ... 2500,0 MHz	35	48	—	dB
	2500,0 ... 3860,0 MHz	28	35	—	dB
	3860,0 ... 3980,0 MHz	45	54	—	dB
	3980,0 ... 5790,0 MHz	28	48	—	dB
	5790,0 ... 6000,0 MHz	40	58	—	dB



Transfer function

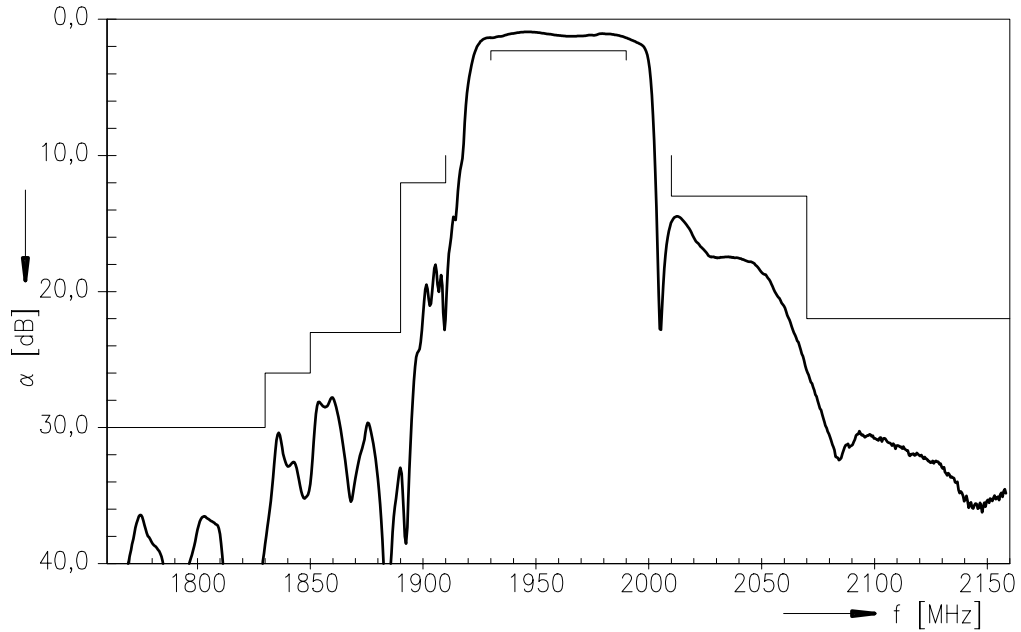

Transfer function (wide band)

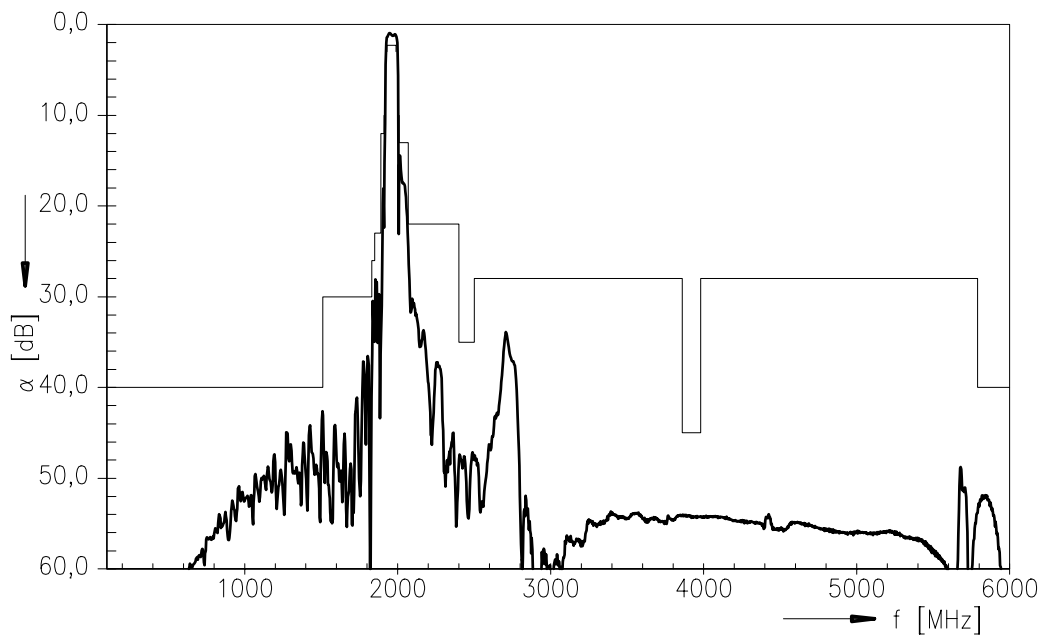



SAW Components

B7851

Low-Loss Filter for Mobile Communication

1960,0 MHz

Data Sheet



Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW MC WT

P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2004. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.