


# Electret Condenser Microphone


## KPCM - 8B , KPCM - 8B - P(6.0X3.0)

UNIT:mm

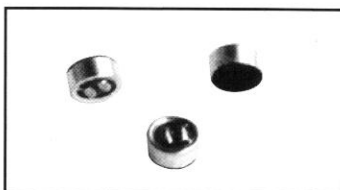

### Dimensions

Lead Wire Type KPCM - 8B PCB Type KPCM - 8B - P

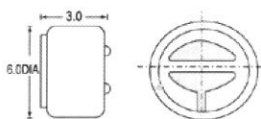


### Specifications

Sensitivity	:See Model No. Table
Impedance	:2.2K Ω Max
Standard Power Supply	:2.0V DC
Current Consumption	:0.5mA Max
Sensitivity Reduction	:within-3dB at 1.0V
S/N Ratio	:more than 60dB
Directivity	:Omnidirectional


Sensitivity (0dB=1v/ub at 1kHz)	Sensitivity show method
-70 ± 2dB	As 1 pa=10ub, therefore when it be pa or ub showed, there would be -20ub distance between them.
-68 ± 2dB	
-66 ± 2dB	
-64 ± 2dB	
-62 ± 2dB	
-60 ± 2dB	
-58 ± 2dB	

For examples:  
 -40dB(0dB=1v/pa)isequivalentto  
 -60dB(0dB=1v/ub)

### Schematic

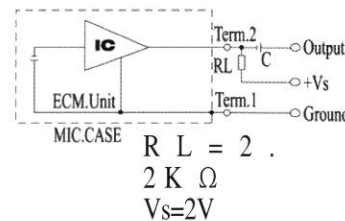


### Frequency Response

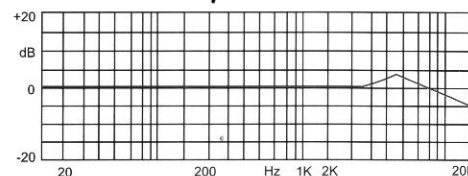


## KPCM - 20B(9.7X5.2)

UNIT:mm

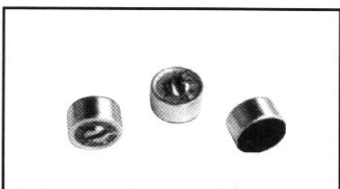

### Dimensions

Lead Wire Type KPCM - 206B

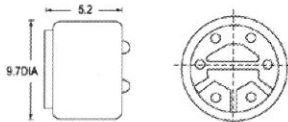


### Specifications

Sensitivity	:See Model No. Table
Impedance	:680 Ω Max
Standard Power Supply	:1.5V DC
Current Consumption	:0.5mA Max
Sensitivity Reduction	:within-1dB at 1.0V
S/N Ratio	:more than 60dB
Directivity	:Uni directional :more than - 13dB at 180°


Sensitivity (0dB=1v/ub at 1kHz)	Sensitivity show method
-66 ± 2dB	As 1 pa=10ub, therefore when it be pa or ub showed, there would be -20ub distance between them.
-64 ± 2dB	
-62 ± 2dB	
-60 ± 2dB	
-58 ± 2dB	
-56 ± 2dB	

For examples:  
 -40dB(0dB=1v/pa)isequivalentto  
 -60dB(0dB=1v/ub)

### Schematic

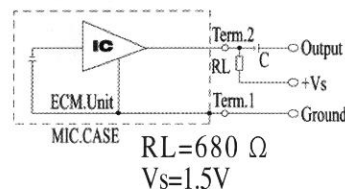


### Frequency Response

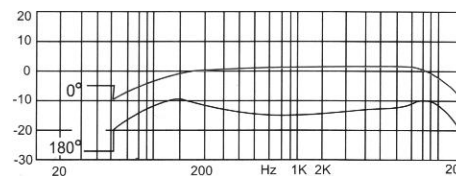


## KPCM - 88B , (14X22)

UNIT:mm

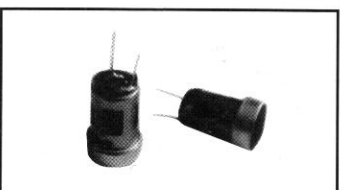

### Dimensions

Lead Wire Type KPCM - 88B

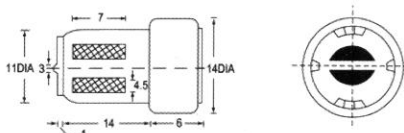


### Specifications

Sensitivity	:See Model No. Table
Impedance	:680 Ω Max
Standard Power Supply	:1.5V DC
Current Consumption	:0.5mA Max
Sensitivity Reduction	:within-1dB at 1V
S/N Ratio	:more than 60dB
Directivity	:Uni directional :more than - 18dB at 180°


Sensitivity (0dB=1v/ub at 1kHz)	Sensitivity show method
-66 ± 2dB	As 1 pa=10ub, therefore when it be pa or ub showed, there would be -20ub distance between them.
-64 ± 2dB	
-62 ± 2dB	
-60 ± 2dB	
-58 ± 2dB	
-56 ± 2dB	

For examples:  
 -40dB(0dB=1v/pa)isequivalentto  
 -60dB(0dB=1v/ub)

### Schematic

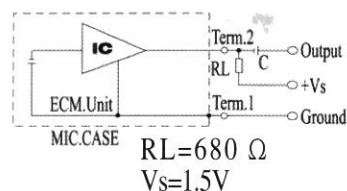

### Frequency Response

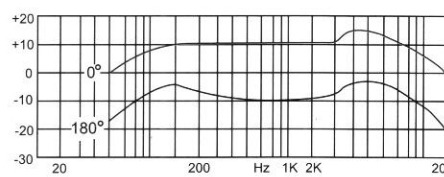

The information contained herein is believed to be correct, but no guarantee for accuracy, completeness. KEPO Electronics Ltd. reserves the right to make changes without notification.