
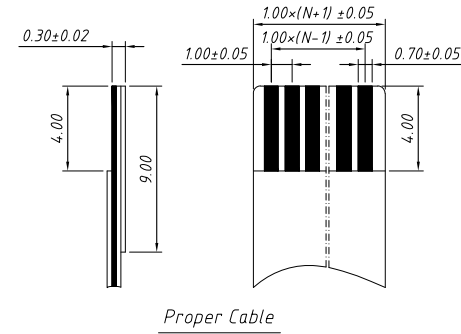


Material  
 Housing:LCP, UL94V-0  
 Lock:LCP, UL94V-0  
 Plug spring:Phosphor Bronze,Gold/Tin  
 Soldering:Phosphor Bronze,Gold/Tin

Electrical  
 Voltage rating: 50 V  
 Current Rating: 0.5 A  
 Withstanding Voltage: 500 V  
 Insulation resistance: 800MΩ.Min.  
 Contact resistance: 20 mΩ.Max.



Mechanical  
 Temp. Range: -25 °C ~ + 85 °C

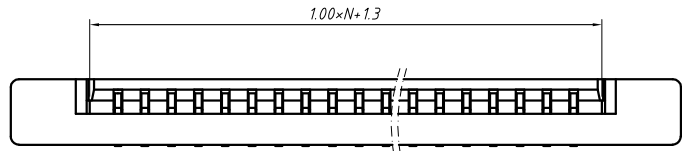

Proper Cable

Order Information

L-KLS1- 1240D - 2.5- XX -T-U-R




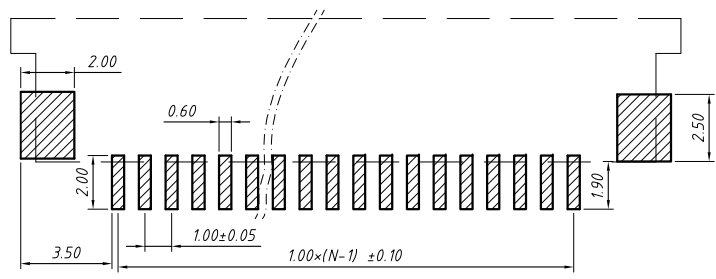
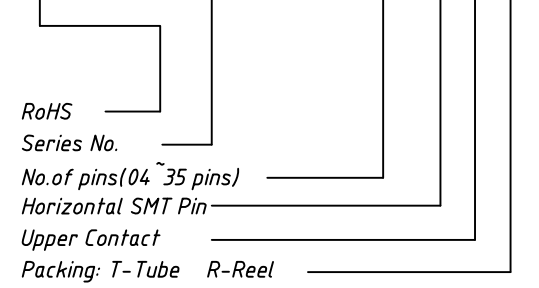


PCB Layout


GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:	
X	±0.15	X	±5°	UNITS	mm	CONN FFC 1.00mm,SMD, Horizontal,Upper Contact ,with ZIF L-KLS1-1240D-2.5-XX-T-U-R	
.X	±0.03	.X	±3°	SHEET SIZE	A4		
.XX	±0.05	.XX	±2°	KLS P/N:			

Draw by: Date	2018-03-10
Check by: Date	2018-03-10
SCALE	SHEET OF

NingBo KLS ELECTRONIC CO.,LTD.

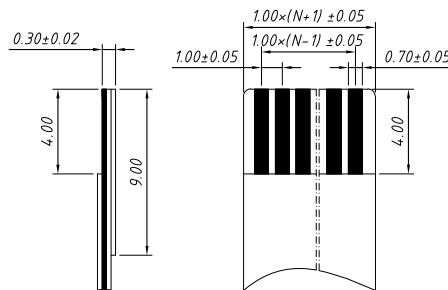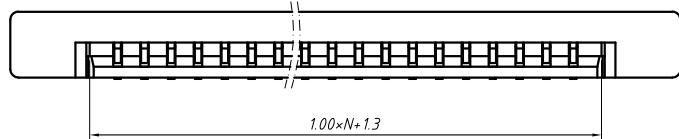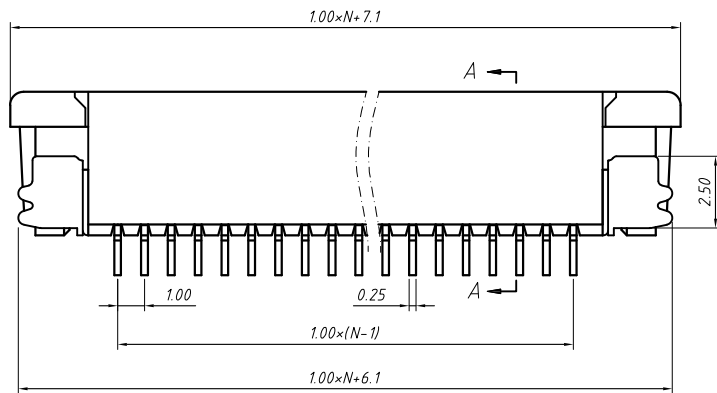

Proper Cable

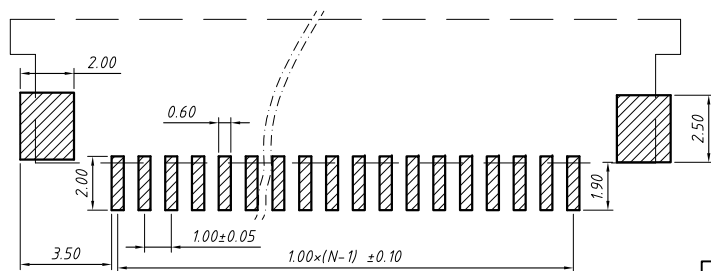

PCB Layout

Material  
Housing:LCP, UL94V-0  
Lock:LCP, UL94V-0  
Plug spring:Phosphor Bronze,Gold/Tin  
Soldering:Phosphor Bronze,Gold/Tin

Electrical  
Voltage rating: 50 V  
Current Rating: 0.5 A  
Withstanding Voltage: 500 V  
Insulation resistance: 800MΩ.Min.  
Contact resistance: 20 mΩ.Max.

Mechanical  
Temp. Range: -25 °C ~ + 85 °C

Order Information

L-KLS1- 1240D - 2.5- XX -T-L-R

RoHS  
Series No.  
No.of pins(04 ~35 pins)  
Horizontal SMT Pin  
Lower Contact  
Packing: T-Tube R-Reel

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	Description:
X. ±0.15	X. ±5°	UNITS	CONN FFC 1.00mm,SMD,
.X ±0.03	.X ±3°	SHEET SIZE	Horizontal,Lower Contact , with ZIF
.XX ±0.05	.XX ±2°	KLS P/N:	L-KLS1-1240D-2.5-XX-T-L-R

Draw by: Date	2018-03-10
Check by: Date	2018-03-10
SCALE	SHEET OF



NingBo KLS ELECTRONIC CO.,LTD.