R13-203

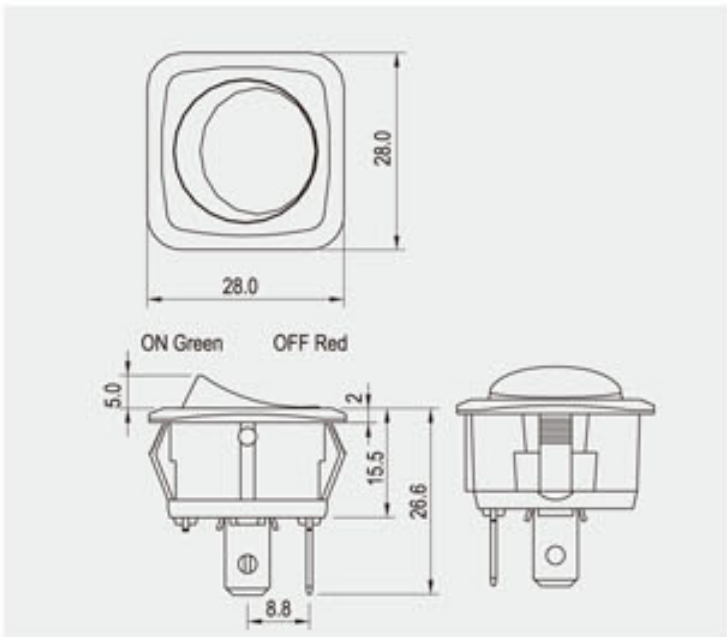

Rating
16A 125V AC 10A 250V AC
Contact resistance
50mΩ Max
Insulation resistance
DC 500V 100MΩ Min
Dielectric strength
AC 1500V 1 minute
Cut-out



1~4.0 mm max

Cut-out for X8 ROCKER



1~3.0 mm max

FEATURES

* MATERIAL: Frame is nylon (UL flame: 94V-2). Terminals are silver plated brass.
* Illuminated actuators are molded in PC, available with red, amber, green, blue and white colors.
* Snap-in mounting, easy to install switch into panel.
* New design AC LED.

Ordering number instruction

R13-203 □□□ - □□ - □□□□□□ - □

FUNCTION

Illuminated / Different position（帶燈／動作特性不同）

A L



B

C L



Different position（動作特性不同）

A



C



Waterproof（防水）

A 8



B 8



C 8

ROCKER

1

AL,CL

2 Laser mark

AL,CL

3

A,C,AL,CL

8 Waterproof cover

A8,B8,C8

TERMINAL

0 1 .250" SQ

FRAME COLOR

ROCKER COLOR

LED COLOR(ON,ON)

LED COLOR(OFF,ON)

COLOR

A AMBER
B BLACK
G GREEN
C CLEAR
R RED
N NONE

VOLTAGE

4 125VAC(110VAC)
5 250VAC(220VAC)

ACTUATOR MARKING

Optional legend on actuator, see page A4.