



# R13-702



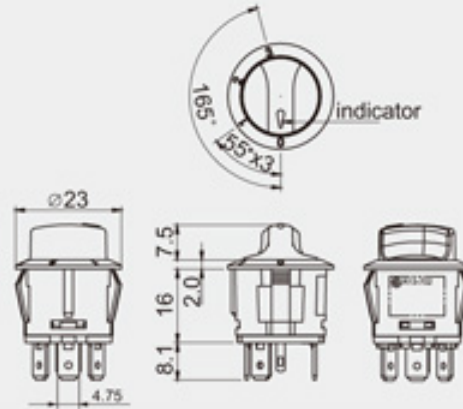

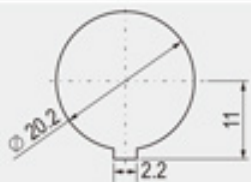


<b>Rating</b>	20A 14V DC, 10A 28V DC
<b>Contact resistance</b>	50mΩ Max
<b>Insulation resistance</b>	DC 500V 100MΩ Min
<b>Dielectric strength</b>	AC 1000V 1 minute
<b>Cut out</b>	
	0.7~3.0 mm max

## FEATURES

- \* **MATERIAL:** Frame is nylon. Terminals are plated brass.
- \* **Position indicator:** The arrow icon can be optional either illuminated or non-illuminated. The position marks can be optional as (0, 1, 2, 3), (off, L, M, H) or other assigned symbols.
- \* **LED** can be dependent or independent circuit.

R13-702   -   -    -     -

FUNCTION	TERMINAL	LEGEND	LED COLOR
<b>A</b> 2P SPST OFF-ON	0 2  .187" SQ	<b>N</b> NONE	<b>KNOB MARKING</b>
<b>B</b> 3P SPDT OFF-ON-ON	<b>KNOB</b>	<b>1</b> 	Optional legend on actuator, see page A1.
<b>C</b> 4P SP3T OFF-ON-ON-ON	<b>1</b> 	<b>2</b> 	<b>VOLTAGE</b>
	<b>FRAME COLOR</b>	<b>3</b> 	<b>1</b> 12V DC
	<b>KNOB COLOR</b>	<b>LIGHT CIRCUIT</b>	<b>2</b> 24V DC
	<b>LENS COLOR</b>	<b>N</b> NONE	
		<b>D</b> LED dependent only for DC	
		<b>I</b> LED independent	