


# Speaker Specification

Customer's Model No.		Customer	宁波天瑞		
Kepe Model No.	KPSP3034MN-0.8/0.5EL80	Size	Φ 30mm	No.	KF3.002.162
No.	Item	Specification	Test Condition		
1	Impedance	$8\Omega \pm 15\%$	at 800Hz		
2	Resonant Fr. ( $f_0$ )	600Hz $\pm$ 20%			
3	Frequency Range	F0-8.0KHz			
4	Rated Power	0.5W			
5	Max Power	0.6W			
6	S.P.L.	83 $\pm$ 3dB	0.1W / 0.1M at 1.0kHz		
7	Distortion	Max 5%	at rated power 1.0kHz		
8	Sweep Test	must be normal	at sine wave 1.4V		
9	Load Test	after test meet item 8	rated noise power, 24 Hrs.		
10	Heat Test	after test meet item 8	50 $\pm$ 2 $^{\circ}$ C 5Hrs.		
11	Cold Test	after test meet item 8	-20 $\pm$ 2 $^{\circ}$ C 5Hrs.		
12	Humidity Test	after test meet item 8	40 $\pm$ 2 $^{\circ}$ C, 90/95%R.H. 5Hrs.		
13	Weight				
14	Polarity Test	When supplied plus D.C. voltage to (+) terminal, the cone must move to forward.			
15	Note				

Dimensions:

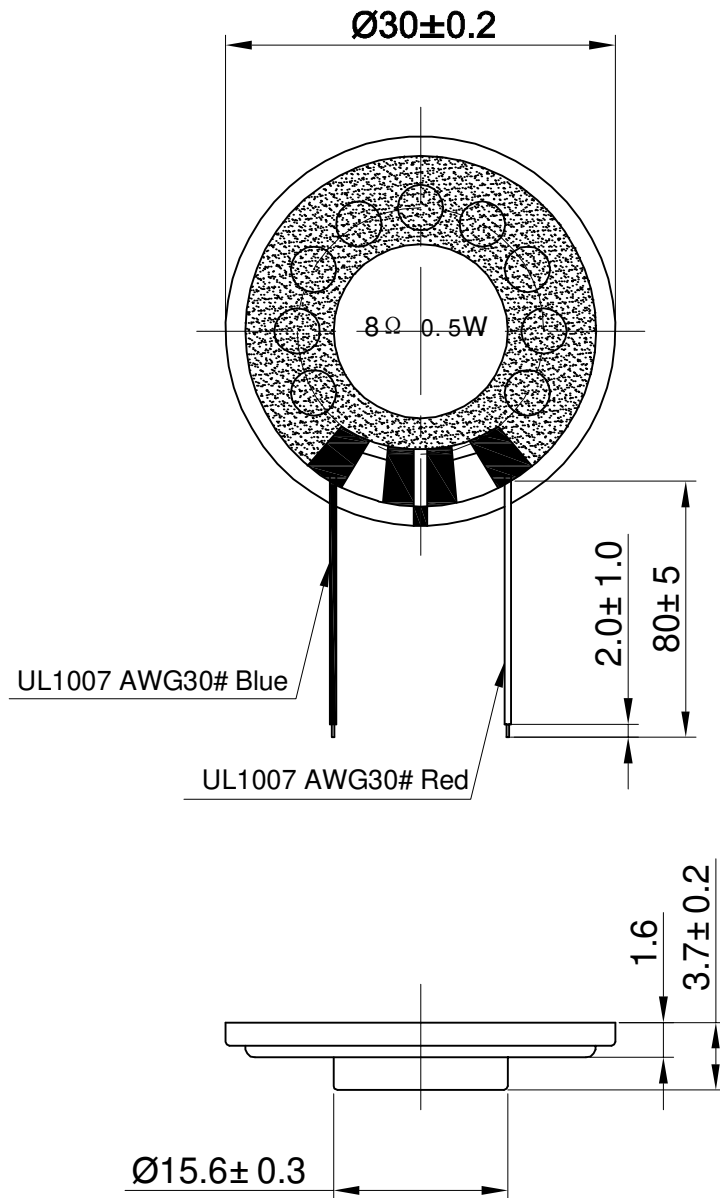

FIRST ANGLE PROJECTION

UNIT : mm  
Tolerance :  $\pm 0.2$