

1

2

3

4

受 控

## SPECIFICATION


## 1. SCOPE

This specification is applied to the piezo-element.

## 2. SPECIFICATION

(at 25°C)

2.1 Resonant Frequency	:	0.8±0.5 KHz
2.2 Resonant Resistace	:	1000 Ω max
2.3 Capacitance	:	80000 pF±30% at 100Hz
2.4 Input Voltage	:	30 Vp-p max
2.5 Operating Temperature	:	-20~+50°C
2.6 Storage Temperature	:	-20~+60°C
3. DIMENSION	:	as per figure

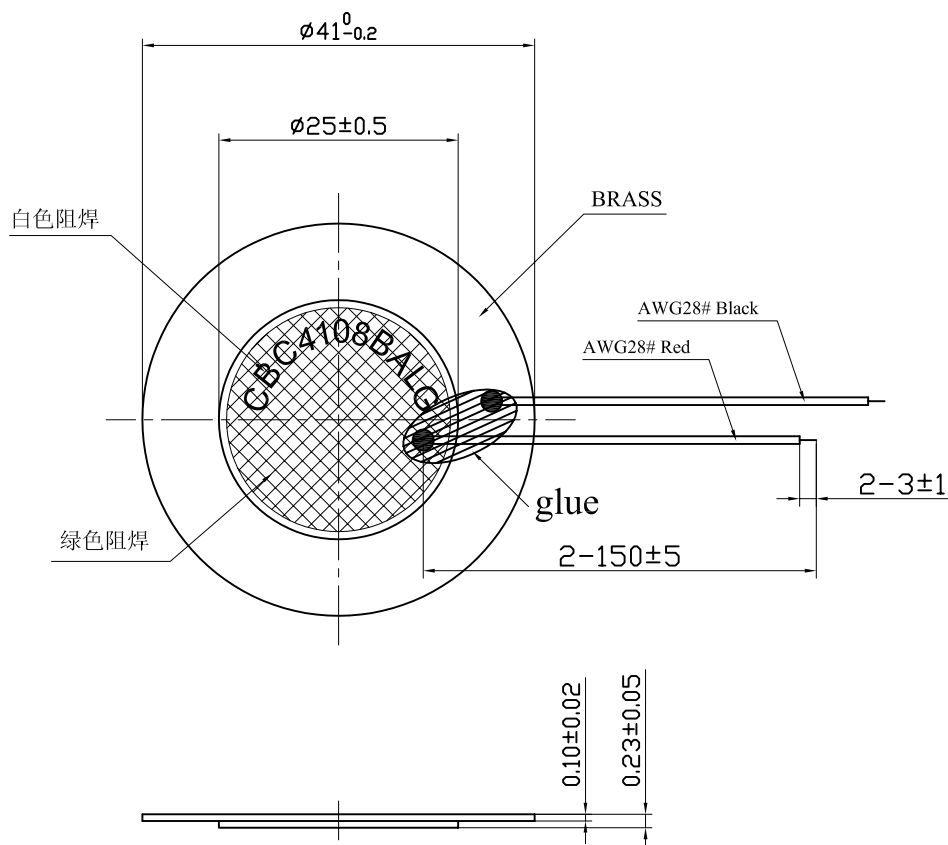


TOLERANCES UNLESS NOTED OTHERWISE

.X ±  
.XX ±  
.XXX ±

90° FORMED +2°  
ANGLES -1°

FIRST ANGLE PROJECTION



DRAWN

汪逸

DESIGN

CHECKED

APPROVED

徐锦生

DATE

09.12.30

CONTRACT NO.

AGENCY APPROVAL

KEPO MODEL NO.

CBC4108BAL-1607

DWG NO.

OEM1607

Ningbo Kepo Electronics Co.,Ltd.

CUSTOMER

QUARTZ-1 LTD

CUSTOMER NO.

VER

1.1

SCALE

UNIT

mm

SHEET

TEL:(+86)574-88370330

FAX:(+86)574-88370329

1

2

3

4