

1

2

3

4

受 控

SPECIFICATION

A

1. SCOPE

This specification is applied to the piezo-element.

2. SPECIFICATION


(at25°C)

- 2.1 Resonant Frequency : 3.8~4.6 KHz
 2.2 Resonant Resistace : 350 Ω max
 2.3 Capacitance : 14000~28000 pF at 100Hz
 2.4 Input Voltage : 30 Vp-p max
 2.5 Operating Temperature : -20~+60°C
 2.6 Storage Temperature : -20~+70°C

3. DIMENSION

: as per figure

B

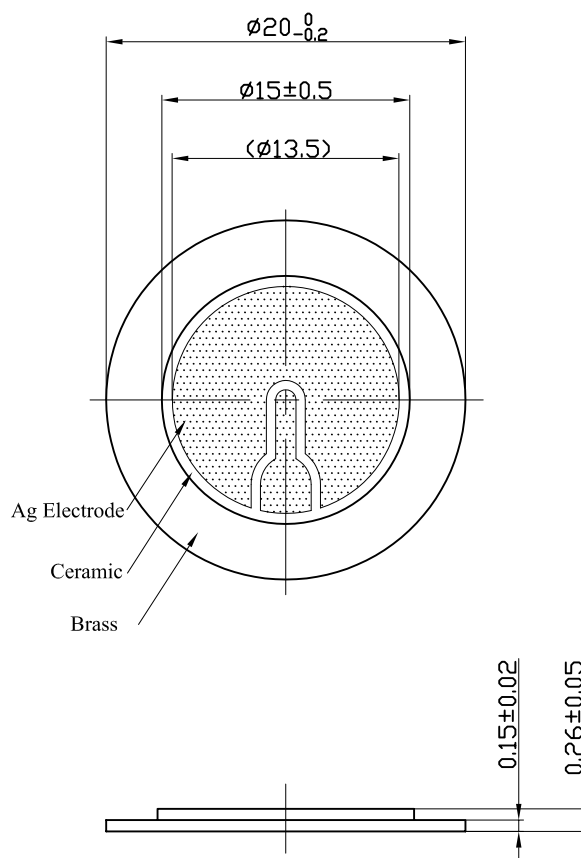

C


D

TOLERANCES UNLESS NOTED OTHERWISE

.X ±
 .XX ±
 .XXX ±

90° FORMED +2°
 ANGLES -1°

FIRST ANGLE PROJECTION



1

DRAWN

汪逸

DESIGN

CHECKED

APPROVED

徐锦生

DATE

09.12.24

CONTRACT NO.

AGENCY APPROVAL

2

KEPO MODEL NO.

FT-20T-4.0B1

DWG NO.

KC3.001.163

Ningbo Kepo Electronics Co.,Ltd.

3

CUSTOMER

CUSTOMER NO.

VER

1.1

SCALE

UNIT

mm

SHEET

4

TEL:(+86)574-88370330

FAX:(+86)574-88370329

A

B

C

D