


Kodak Lithium Battery

KCR2


Effective : June 2005

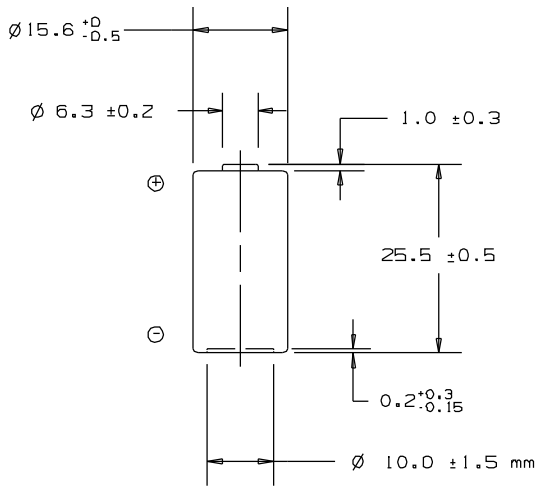


| | |
|--------------------|--|
| System: | Lithium/Manganese Dioxide, Li/MnO ₂ |
| Designation: | ANSI 5046-LC, IEC CR15H270 |
| Nominal Voltage: | 3.0 Volts |
| Capacity: | 850 mAh at 2.5 mA to 1.8 Volts |
| Maximum Discharge: | 1000 mA Continuous, 2500 mA Pulse |
| Temperature Range: | -40°C to 65°C Operating -20°C to 45°C Storage |
| Average Weight: | 12 grams |
| Volume: | 5.16 cm ³ |
| Terminals: | Flat Contacts, Recessed Negative |
| Jacket: | Foil Label |
| Lithium Content: | <0.5 grams/Battery |
| Shelf Life: | 10 years to 90% of original capacity. |

NOTE: 1) Recognized under the Component Program of Underwriters Laboratories Inc.


Typical Pulse (Photoflash) Characteristics KCR2

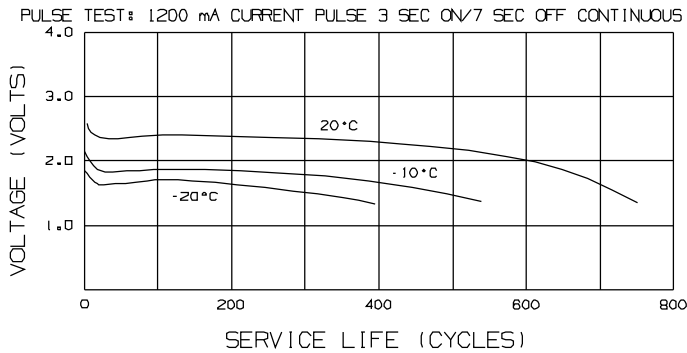


Typical Pulse (Photoflash) Characteristics KCR2

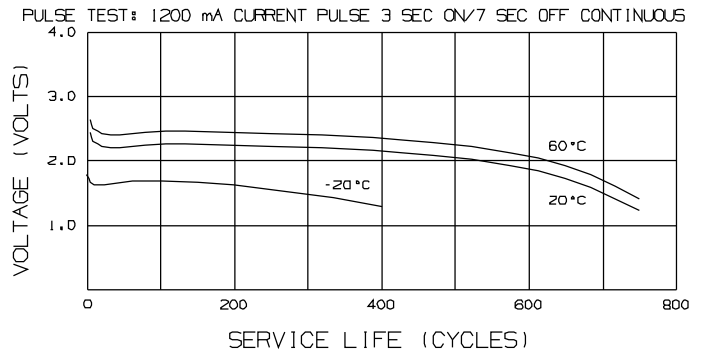

Typical Discharge Characteristics KCR2

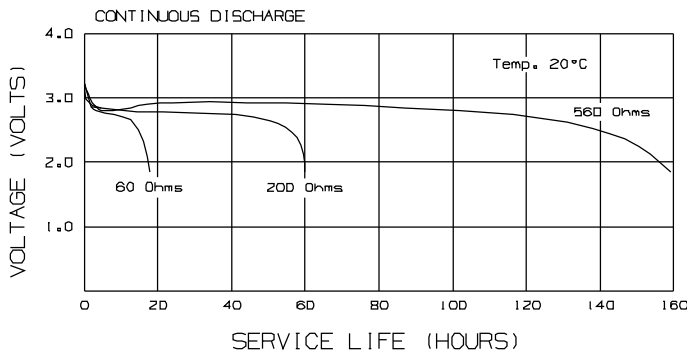

Typical Pulse (Photoflash) Characteristics KCR2

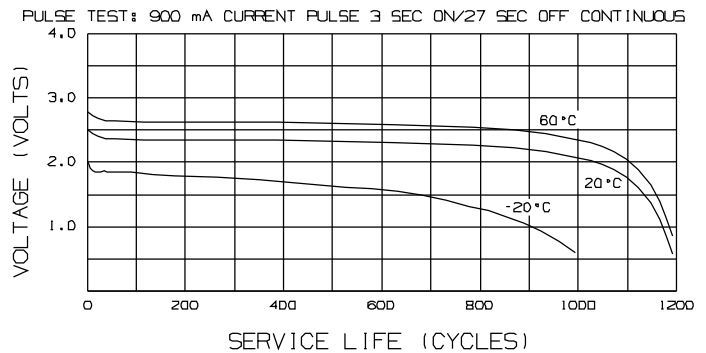

KCR2: (approx 1% capacity loss / year under normal storage conditions. All values are typical and not minimum)
(Discharge performed at +20 degrees C)

| | Fresh | 1 years | 2 years | 3 years | 4 years | 5 years | 10 years |
|-------------------------|-------|---------|---------|---------|---------|---------|--------------|
| 900 mA ANSI pulse test | 1060 | 1050 | 1040 | 1030 | 1020 | 1010 | 960 (Pulses) |
| 1200 mA ANSI pulse test | 790 | 780 | 770 | 760 | 750 | 740 | 650 (Pulses) |

The curves and data in this publication represent product tested under the conditions specified. They do not represent standards or specifications which must be met by Eastman Kodak Company. The company reserves the right to change and improve product characteristics at any time.

For more information, contact
EASTMAN KODAK COMPANY
343 State Street
Rochester, New York 14650-0811
1-800-242-2424
www.kodak.com/go/batteries