

Metallic Cable Glands

KLS8-0615A PG Type Metallic Cable Glands

Material: Brass with nickel plated

Claw: Nylon plastic(PA), UL94-V2

Sealing: NBR


O-Sealing ring: NBR

Protection Class: IP68 (the wire/cable is in clamping range,
and assemble O-Ring on the groove)

Range of temperature: -40°C ~ 100°C



Item No.	Cable Range >IØI< (mm)	Outer diameter of thread (mm)	Mounting hole diameter (mm)	Thread length L(mm)	Joint length H(mm)	Wrench diameter (MM)
PG-7	3-6.5	12.5	12.5-12.7	5	18	14
PG-7S	2-5	12.5	12.5-12.7	5	18	14
PG-9	4-8	15.2	15.2-15.4	6	20	17
PG-9S	2-6	15.2	15.2-15.4	6	20	17
PG-11	5-10	18.6	18.6-18.8	6	21	20
PG-11S	3-7	18.6	18.6-18.8	6	21	20
PG-13.5	6-12	20.4	20.4-20.6	6.5	22	22
PG-13.5S	5-9	20.4	20.4-20.6	6.5	22	22
PG-16	10-14	22.5	22.5-22.7	6.5	23	24
PG-16S	7-12	22.5	22.5-22.7	6.5	23	24
PG-21	13-18	28.3	28.3-28.5	7	25	30
PG-21S	9-16	28.3	28.3-28.5	7	25	30
PG-29	18-25	37	37-37.2	8	30	40
PG-29S	13-20	37	37-37.2	8	30	40
PG-36	22-32	47	47-47.2	8	35	50
PG-36S	20-26	47	47-47.2	8	35	50
PG-42	32-38	54	54-54.2	9	38	57
PG-42S	25-31	54	54-54.2	9	38	57
PG-48	37-44	59.3	59.3-59.5	10	40	64
PG-48S	29-35	59.3	59.3-59.5	10	40	64

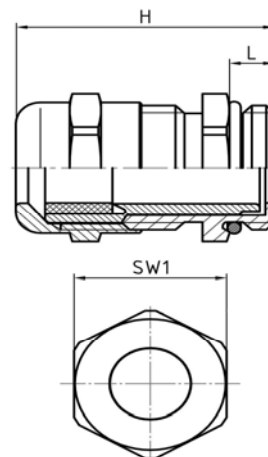

Oder Information

KLS8-0615A-PG-7

0615A: PG Type Metallic Cable Glands

PG-7: Item No.