


File Number 873

2N6530, 2N6531, 2N6532, 2N6533

8-Ampere N-P-N Darlington Power Transistors

80, 100, 120 Volts, 60 Watts
 Gain of 1000 at 5 A (2N6530, 2N6532)
 Gain of 1000 at 3 A (2N6533)
 Gain of 500 at 3 A (2N6531)

- | | |
|--|--|
| Features: | Applications: |
| <ul style="list-style-type: none"> ■ Operate from IC without predriver ■ Low leakage at high temperature | <ul style="list-style-type: none"> ■ Power switching ■ Hammer drivers ■ Series and shunt regulators ■ Audio amplifiers |

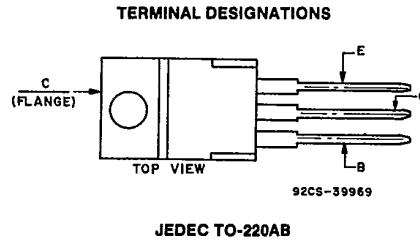

The RCA-2N6530, 2N6531, 2N6532, and 2N6533[®] are monolithic n-p-n silicon Darlington transistors designed for power applications at low and medium frequencies. The construction of these devices provides good forward-bias second-breakdown characteristics. Their high gain allows them to be driven directly from integrated circuits.

These devices are supplied in the JEDEC TO-220AB (VERSAWATT) plastic package.




Fig. 1—Schematic diagram for all types.

MAXIMUM RATINGS, Absolute-Maximum Values:

	2N6530	2N6531	2N6532	2N6533	
*V _{CB0}	80	100	100	120	V
V _{CER(sus)}					
R _{BE} = 100 Ω	80	100	100	120	V
V _{CEO(sus)}	80	100	100	120	V
*V _{CEV(sus)}					
V _{BE} = -1.5 V	80	100	100	120	V
*V _{EBO}	5	5	5	5	V
*I _C	8	8	8	8	A
I _{CM}	15	15	15	15	A
*I _B	0.25	0.25	0.25	0.25	A
*P _T					
Up to 25°C	65	65	65	65	W
Above 25°C	See Fig. 3				
*T _J , T _{stg}	-65 to +150				°C
*T _L					
At distances ≥ 1/8 in. (3.17 mm) from case for 10 s max.	235				°C

* In accordance with JEDEC registration data format JS-6, RDF-4.

3875081 G E SOLID STATE
Darlington Power Transistors

01E 17254

D T-33-29

2N6530, 2N6531, 2N6532, 2N6533

ELECTRICAL CHARACTERISTICS, At Case Temperature (T_C) = 25°C unless
otherwise specified

CHARACTERISTIC SYMBOL	TEST CONDITIONS				LIMITS				UNITS
	VOLTAGE V _{dc}		CURRENT A _{dc}		2N6530		2N6531		
	V _{CE}	V _{BE}	I _C	I _B	Min.	Max.	Min.	Max.	
I _{CEO}	80			0	—	1	—	—	mA
	100			0	—	—	—	1	
I _{CEV}	80	-1.5			—	0.5	—	—	
	100	-1.5			—	—	—	0.5	
T _C = 125°C	80	-1.5			—	5	—	—	
	100	-1.5			—	—	—	5	
I _{EBO}		-5	0		—	5	—	5	mA
h _{FE}	3		5 ^a		1,000	10,000	—	—	
	3		3 ^a		—	—	500	10,000	
	3		8 ^a		100	5,000	100	5,000	
V _{CEO(sus)}			0.2	0	80 ^b	—	100 ^b	—	V
V _{CER(sus)} R _{BE} = 100 Ω			0.2		80 ^b	—	100 ^b	—	
V _{CEV(sus)}		-1.5	0.2		80 ^b	—	100 ^b	—	
V _{BE}	3		5 ^a		—	2.8	—	—	V
	3		3 ^a		—	—	—	2.8	
	3		8 ^a		—	4.5*	—	4.5*	
V _{CE(sat)}			3 ^a	0.006	—	—	—	3	V
			5 ^a	0.01	—	2	—	—	
			8 ^a	0.08	—	3*	—	3*	
V _F			5 ^a		—	—	—	4	V
			8 ^a		—	5	—	—	
h _{fe} f = 1 kHz	5		1		1,000	—	1,000	—	
h _{fe} f = 1 MHz	5		1		20	—	20	—	
C _{obo} V _{CB} = 10 V f = 1 MHz					—	200	—	200	pF
I _{S/b} t = 0.5 s, nonrep.	24				2.7	—	2.7	—	A
R _{θJC}					—	1.92	—	1.92	°C/W

* In accordance with JEDEC registration data format JS-6, RDF-4.

a Pulsed, pulse duration = 300 μs, duty factor ≤ 2%.

b CAUTION: Sustaining voltages V_{CEO(sus)}, V_{CER(sus)}, and V_{CEV(sus)} MUST NOT be measured on a curve tracer.

3875081 G E SOLID STATE

01E 17255

D T-33-29

Darlington Power Transistors

2N6530, 2N6531, 2N6532, 2N6533


ELECTRICAL CHARACTERISTICS, At Case Temperature (T_C) = 25°C unless otherwise specified

CHARACTERISTIC SYMBOL	TEST CONDITIONS				LIMITS				UNITS
	VOLTAGE V dc		CURRENT A dc		2N6532		2N6533		
	V _{CE}	V _{BE}	I _C	I _B	Min.	Max.	Min.	Max.	
I _{CEO}	120			0	—	—	—	1	mA
	100			0	—	1	—	—	
I _{CEV}	120	-1.5			—	—	—	0.5	
	100	-1.5			—	0.5	—	—	
T _C = 125°C	120	-1.5			—	—	—	5	
	100	-1.5			—	5	—	—	
I _{EBO}		-5	0		—	5	—	5	mA
h _{FE}	3		3 ^a		—	—	1,000	10,000	
	3		5 ^a		1,000	10,000	—	—	
	3		8 ^a		100	5,000	100	5,000	
V _{CEO(sus)}			0.2	0	100 ^b	—	120 ^b	—	V
V _{CER(sus)} R _{BE} = 100 Ω			0.2		100 ^b	—	120 ^b	—	
V _{CEV(sus)}		-1.5	0.2		100 ^b	—	120 ^b	—	
V _{BE}	3		3 ^a		—	—	—	2.8	V
	3		5 ^a		—	2.8	—	—	
	3		8 ^a		—	4.5*	—	4.5*	
V _{CE(sat)}			3 ^a	0.006	—	—	—	2	V
			5 ^a	0.01	—	2	—	—	
			8 ^a	0.08	—	3*	—	3*	
V _F			5 ^a		—	—	—	4	V
			8 ^a		—	5	—	—	
h _{fe} f = 1 kHz	5		1		1,000	—	1,000	—	
h _{fe} f = 1 MHz	5		1		20	—	20	—	
C _{obo} V _{CB} = 10 V f = 1 MHz					—	200	—	200	pF
I _{S/b} t = 0.5 s, nonrep.	24				2.7	—	2.7	—	A
R _{θJC}					—	1.92	—	1.92	°C/W

* In accordance with JEDEC registration data format JS-6, RDF-4.


^a Pulsed, pulse duration = 300 μs, duty factor ≤ 2%.^b CAUTION: Sustaining voltages V_{CEO(sus)}, V_{CER(sus)}, and V_{CEV(sus)} MUST NOT be measured on a curve tracer.

2N6530, 2N6531, 2N6532, 2N6533

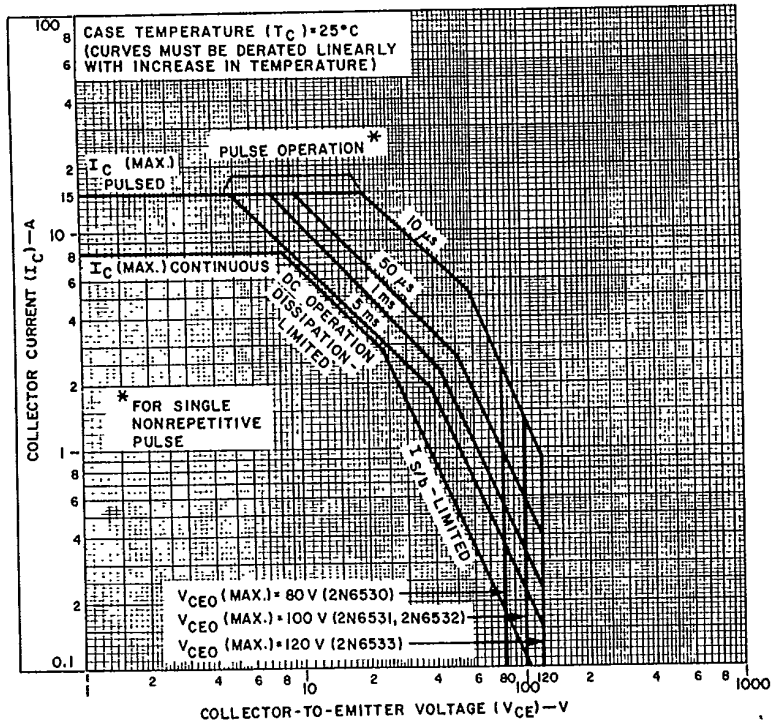


92CS-24603RI

Fig. 2—Maximum operating areas for all types at case temperature of 25°C.

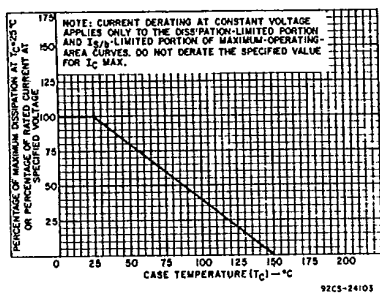

92CS-24103

Fig. 3—Dissipation derating curve for all types.

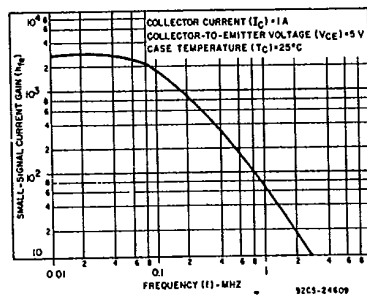

92CS-24409

Fig. 4—Typical small-signal current gain for all types.

2N6530, 2N6531, 2N6532, 2N6533

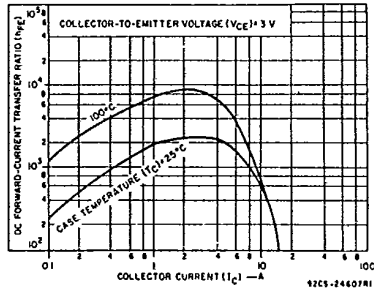


Fig. 5 - Typical dc beta characteristics for all types.

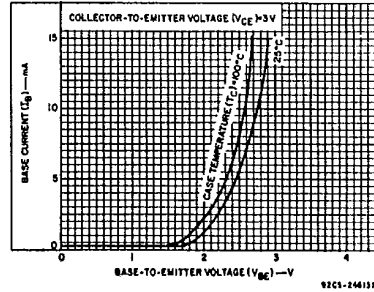


Fig. 6 - Typical input characteristics for all types.

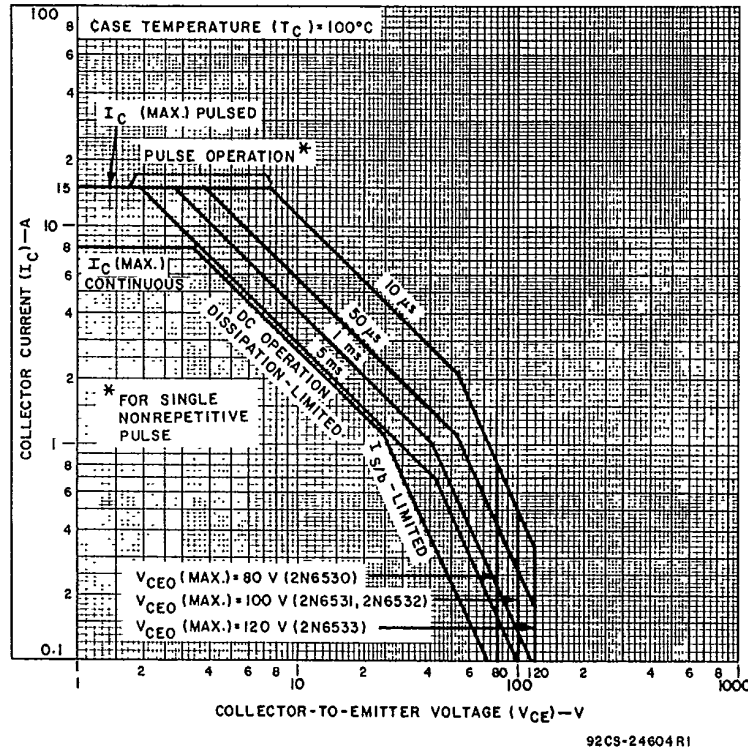


Fig. 7 - Maximum operating areas for all types at case temperature of 100°C.

3875081 G E SOLID STATE
Darlington Power Transistors

01E 17258 D T-33-29

2N6530, 2N6531, 2N6532, 2N6533

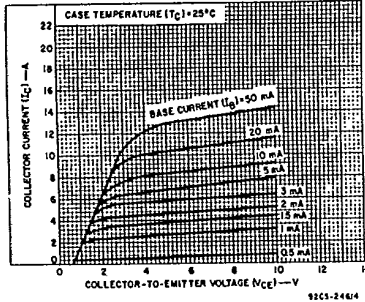


Fig. 8 — Typical output characteristics for all types.

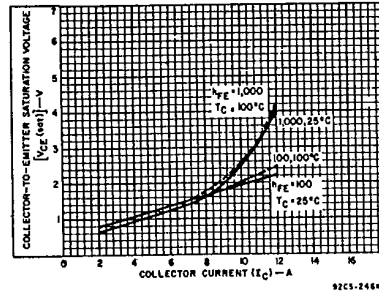


Fig. 9 — Typical saturation characteristics for all types.

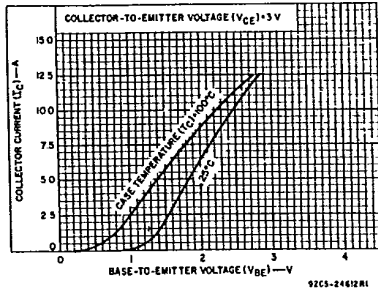


Fig. 10 — Typical transfer characteristics for all types.

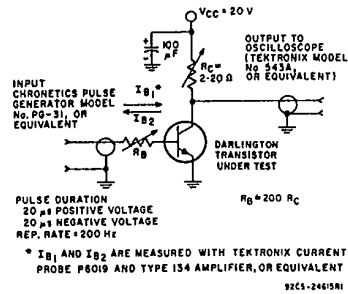


Fig. 11 — Circuit used to measure saturated switching-times.

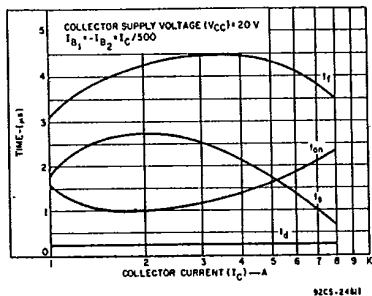


Fig. 12 — Typical saturated switching-time characteristics for all types.

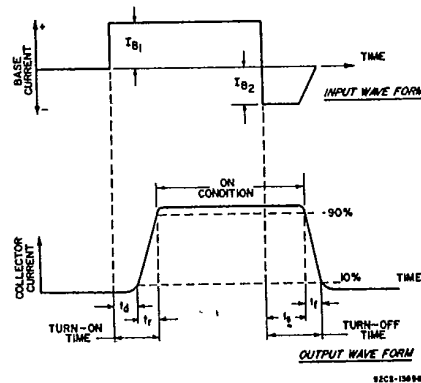


Fig. 13 — Phase relationship between input current and output current, showing reference points for specification of switching-times.

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.