


ARL-3014UEUGC/3L

Package Dimensions

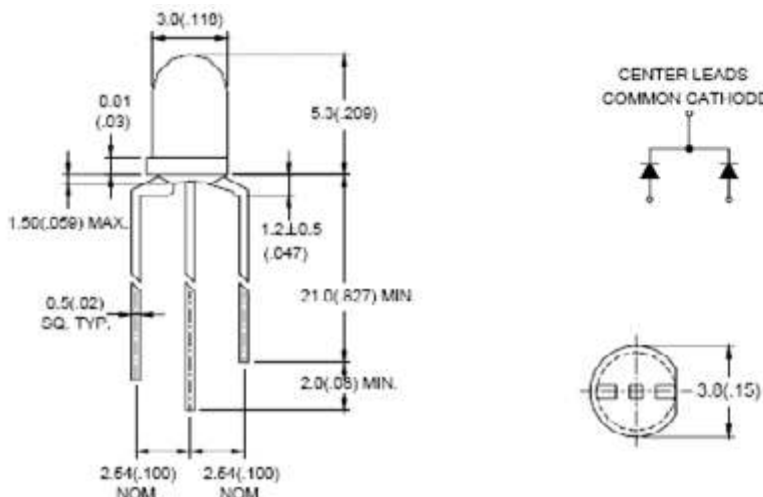

Notes: 1. Other dimensions are in millimeters, tolerance is 0.25mm except being specified.

2. Protruded resin under flange is 1.5mm Max LED.

3. Bare copper alloy is exposed at tie-bar portion after cutting.

Features

- Two chips are matched for uniform light output, wide viewing angle
- Long life-solid state reliability
- I.C. compatible/Low power consumption
- Pb free

Description

- The LED lamps contain two integral chips and is available as both bicolor and bipolar types
- The Bright Red and Green light is emitted by diodes of GaAsP/GaP and GaAsP/GaP respectively
- Type of bipolar lamps are both White Diffused and Color Diffused while the bicolor are White Diffused

Applications

- Status indicators
- Commercial use
- Advertising Signs
- Back lighting

Usage Notes

Surge will damage the LED. When using LED, it must use a protective resistor in series with DC current about 20mA.

Absolute Maximum Rating ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Absolute Maximum Rating	Units
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	I_{FPM}	60	mA
Forward Current	I_{FM}	30	mA
Reverse Voltage	V_R	5	V
Power Dissipation	P_D	140	mW
Operating Temperature	T_{opr}	-40 ~ +80	$^\circ\text{C}$
Storage Temperature	T_{stg}	-40 ~ +100	$^\circ\text{C}$
Soldering Temperature	T_{sol}	260	$^\circ\text{C}$







Device Selection Guide

Part No.	Chip		Lens Color
	Material	Emitted Color	
ARL-3014UEUGC/3L	AlGaInP	Red	Water clear
	AlGaInP	Green	Water clear

Electrical / Optical Characteristics at TA=25°C

Parameter	Symbol	Device	Min	Typ.	Max.	Units	Test Conditions
Luminous Intensity	I _v	Red	250	---	500	mcd	IF=20mA
		Green	150	---	300		
Viewing Angle	2θ1/2	Red	30	---	40	Deg	(Note 1)
		Green					
Peak Emission Wavelength	λ _p	Red	620	630	635	nm	IF=20mA
		Green	565	570	575		
Spectral Line Half-Width	Δλ	Red	15	20	25	nm	IF=20mA
		Green	15	20	25		
Forward Voltage	V _F	Red	1.9	---	2.3	V	IF=20mA
		Green	1.9	---	2.3		
Reverse Current	I _R	Red	---	---	10	μA	VR=5V
		Green	---	---			

Typical Electro-Optical Characteristics Curves

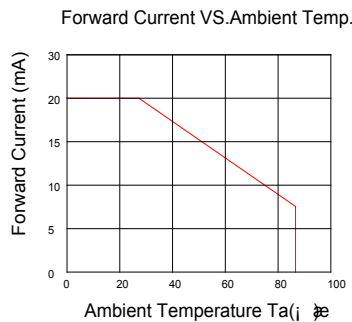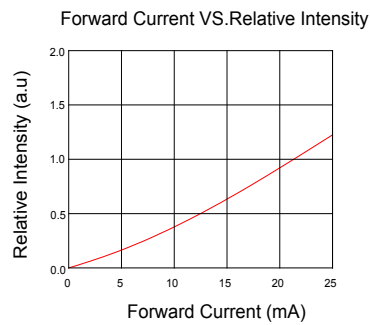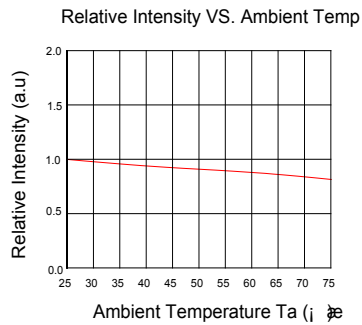

Notes: 1. Above specification may be changed without notice. ARLIGHT will reserve authority on material change for above specification.

2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. ARLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.

3. These specification sheets include materials protected under copyright of ARLIGHT corporation. Please don't reproduce or cause anyone to reproduce them without ARLIGHT's consent.