



Переключатель клавишный KCD2-21N герметичный с фиксацией, с подсветкой


Артикул Q-2283

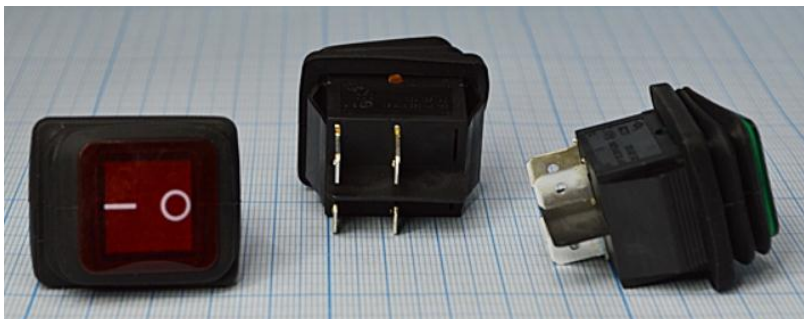

Product Type : KCD2-21N-FA4A-B-G-01
 Max.Rating Current : 16(4)A 250V AC
 Contact Resistance : $\leq 50\text{m}\Omega$
 Insulation Resistance : $\geq 1000\text{M}\Omega$
 Dielectric Strength : 1500V AC ,1min
 Electronic Life : 10,000 cycles
 Mechanical Life : 50,000 cycles
 Operating Temperature : T55,T85,T125
 Protection Degree : IP65
 Certificate : CE、CQC、UL、CB、ENEC、ROHS




Diagram



Circuit



Arc-Shaped With Shield



Z : Panel Thickness

| Z | X | Y |
|-----------|-----------------------|-----------------------|
| 0.75~1.25 | 28.1 ^{+0.10} | 22.1 ^{+0.10} |
| 1.25~2.00 | 28.2 ^{+0.10} | 22.1 ^{+0.10} |
| 2.00~3.00 | 28.3 ^{+0.10} | 22.1 ^{+0.10} |