


SPECIFICATION

- 1. Rated Voltage 3 VDC
- 2. Operating Voltage 2~5VDC
- 3. Max. Rated Current 30mA/3VDC
- 4. Resonant Frequency 2300±300Hz
- 5. Min. Sound Pressure Level..... 82dB/10cm
- 6. Response Time 50ms
- 7. Case Material PBT
- 8. Operating Temperature -20~+70℃
- 9. Store Temperature -30~+80℃
- 10. Weight 2g

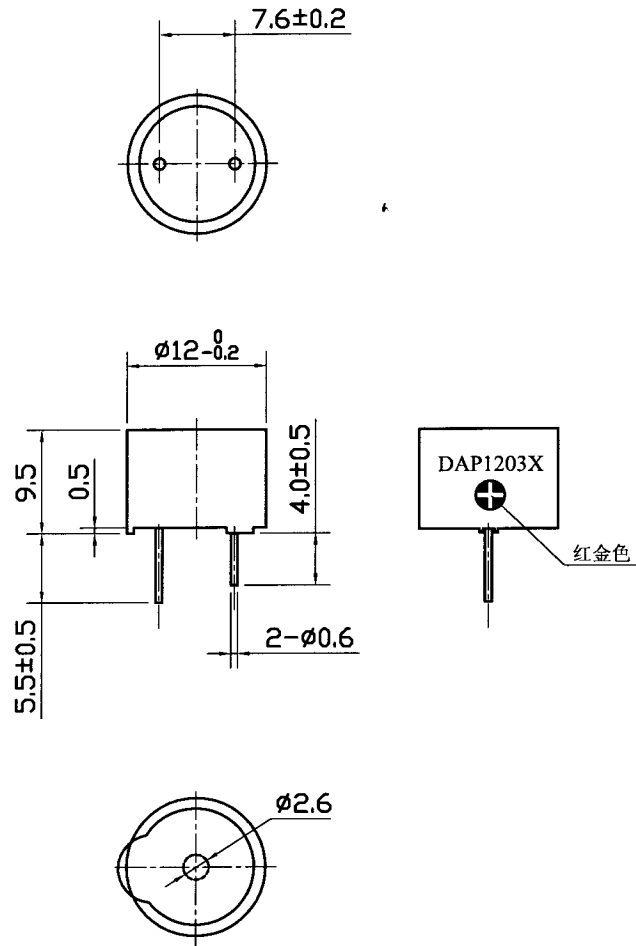

			KEPO NINGBO KEPO ELECTRONIC CO.,LTD http://www.chinaacoustic.com	
1.1	"80dB" → "82dB"	梅海斌	07.11.10	
No.	DESCRIPTION	MENDER	DATE	Magnetic Buzzer 大洋公司
		APPROVALS	DATE	DAP1203X
<small>TOLERANCES UNLESS NOTED OTHERWISE X ± XX ± XXX ± 90° FORMED ±2° ANGLES 1°</small>		DRAWN		UNIT
		CHECKED		mm
FIRST ANGLE PROJECTION		APPROVED	04.04.12	DWG NO. OEM1045
			SCALE	NOT TO SCALE
			SHEET	VER 1.1