


# SMD Crystal Resonators / MHz Band Crystal Resonators

## DSX530GA

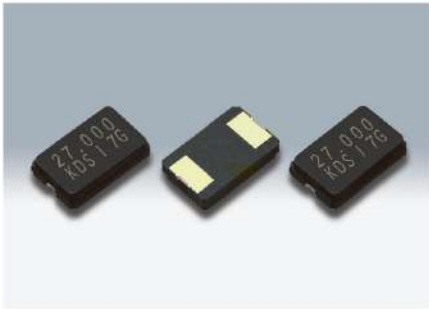

Actual size

### ■ Features

- 5032 size miniature SMD crystal resonator with a low profile of 1.0mm.
- Excellent heat resistance, high precision, and high reliability.
- Offers a wide range of frequencies from 7MHz up to 70MHz. Moisture prevention packing is unnecessary.
- Moisture Sensitivity Level: LEVEL1 (IPC/JEDEC J-STD-033) AEC-Q200 Compliant
- Suitable for PDA, car navigation systems, digital
- AV equipment as well as many other applications.


### ■ Standard Specification

Item	Type	DSX530GA				
		7 ~ 9MHz	9 ~ 12MHz	12 ~ 40MHz	40 ~ 54MHz	45 ~ 70MHz
Frequency Range		7 ~ 9MHz	9 ~ 12MHz	12 ~ 40MHz	40 ~ 54MHz	45 ~ 70MHz
Overtone Order		Fundamental				3rd overtone
Load Capacitance		8pF, 10pF, 12pF				Series
Drive Level		10μW (300μW max.)				10μW (500μW max.)
Frequency Tolerance		±30×10 <sup>-6</sup> (at 25°C)				
Series Resistance		150Ω max.	100Ω max.	50Ω max.		100Ω max.
Frequency Characteristics over Temperature		±50×10 <sup>-6</sup> / -30 ~ +85°C (Ref. to 25°C)				
Storage Temperature Range		-40 ~ +85°C				
Packing Unit		1000pcs./reel (φ180)				

Consult our sales representative for other specifications.


[mm]

### ■ Dimensions

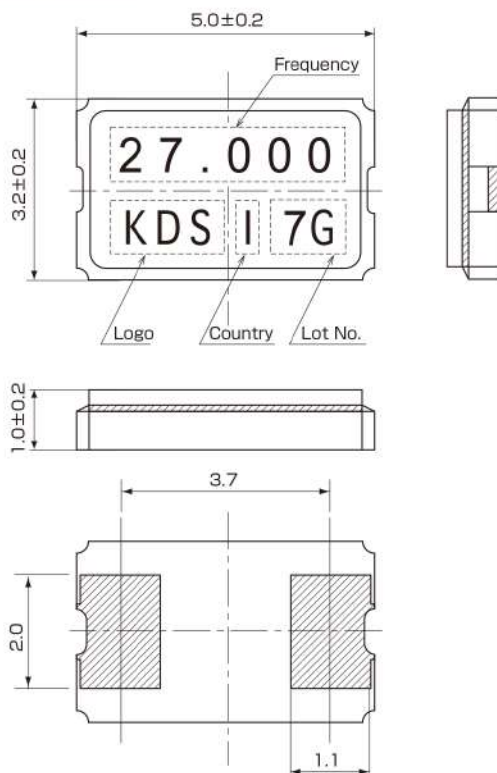

### ■ Internal Connections

<Top View>



### ■ Recommended Land Pattern

<Top View>

