


SPECIFICATION


1. SCOPE

This specification is applied to the piezoelectric diaphragm.

2. MODEL NO.	:	KP50222A
3. SPECIFICATION		(at 25°C)
3.1 Resonant Frequency	:	2.2 ± 0.5 KHz
3.2 Resonant Resistance	:	800 Ω max
3.3 Capacitance	:	70000 pF ± 30% at 100Hz
3.4 Input Voltage	:	30 Vp-p max
3.5 Operating Temperature	:	-20~+50°C
3.6 Storage Temperature	:	-20~+70°C
3.7 Dimension	:	as per figure

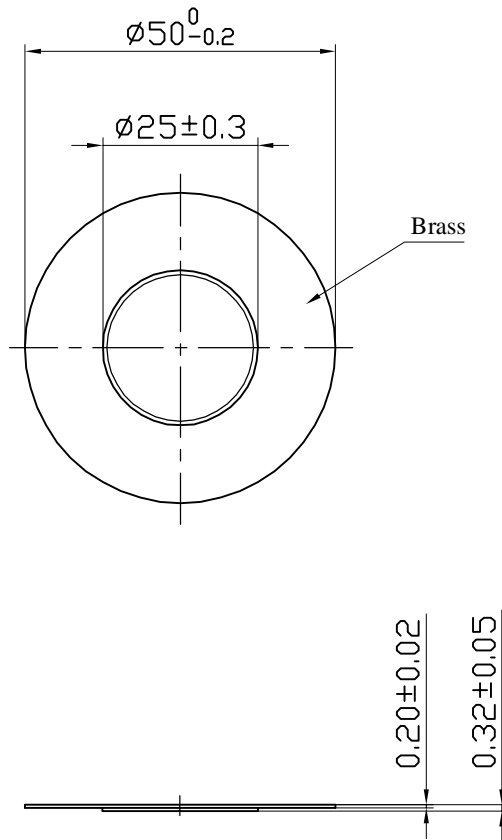

TOLERANCES UNLESS NOTED OTHERWISE .X ± .XX ± .XXX ± 90° FORMED +2° ANGLES -1°	DRAWN		KEPO MODEL NO.	CUSTOMER			
	DESIGN		FT-50T-2.2A1	CUSTOMER NO.			
	CHECKED						
	APPROVED		DWG NO.	VER	1.0	SCALE	
	DATE	05.08.09	KP3.845.775	UNIT	mm	SHEET	
	CONTRACT NO.			KEPO CO.,LTD.			
AGENCY APPROVAL							



TEL: (+86)574-88370330
 FAX: (+86)574-88370329