


DATE	SYM	REVISION RECORD	AUTH.	DR.	CK.
3/04	A	Added Sealing Board Note			

ELECTRICAL SPECIFICATIONS:

- Center Frequency: 10.7000 Mhz
Channel Spacing: 25.0Khz
- Passband @3.0dB: ±7.5Khz Min.
- Stopband: @50.0dB: ±17.5Khz Max.
@65.0dB: ±25.0Khz Max.
- Ripple: 2.0dB Max.
- Insertion Loss: 2.5dB Max.
- Guaranteed Attenuation (@fo±300Khz):
65.0dB Min.
- Temperature Range: -20°C to +70°C
- Terminating Impedance: 3.3K Ohms//1.0pf±0.5pf

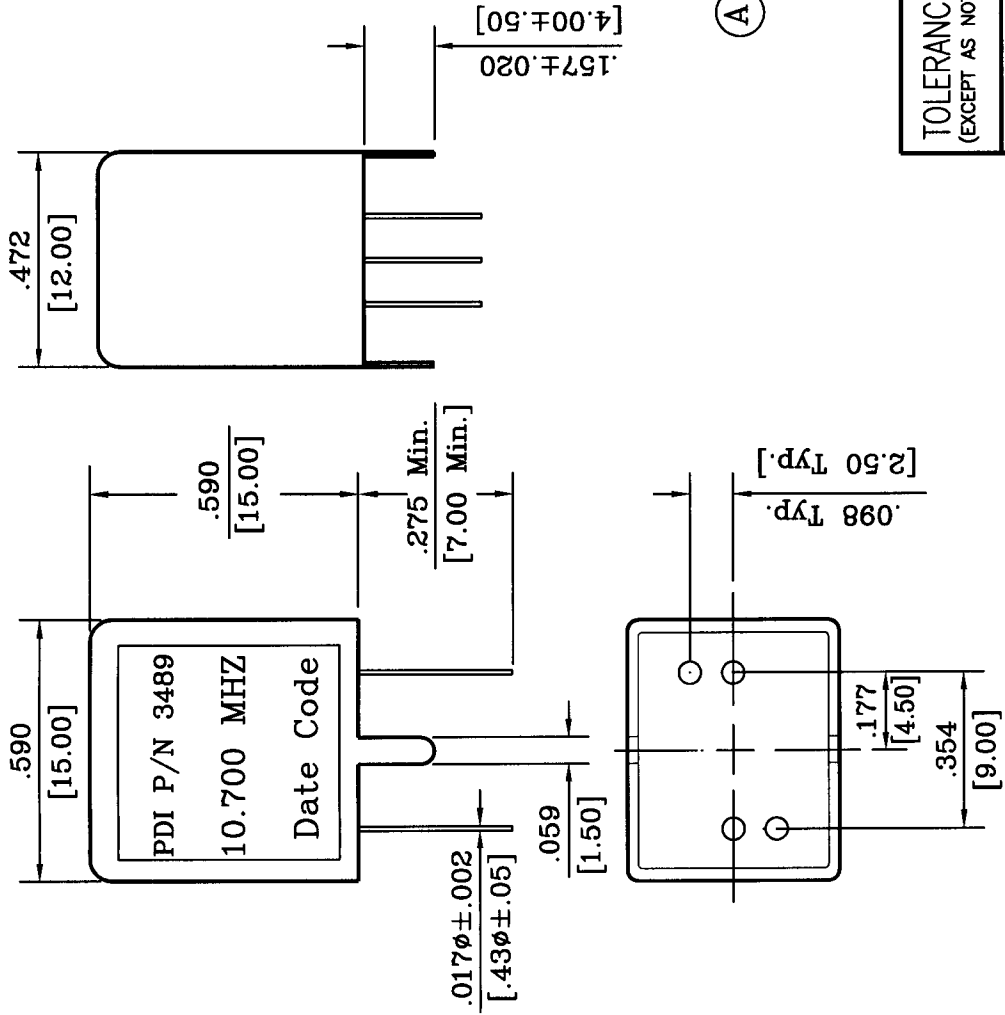

NOTE: Paper Label used for Marking.

Seal: Must be sealed using sealing board, potting or both.

TOLERANCES (EXCEPT AS NOTED)	PRECISION DEVICES INC.	
DECIMAL +/-	Tolerance: Decimal: ±.008 Metric: ±[.20]	SCALE N.T.S.
FRACTIONAL +/-	DRAWN BY <i>D. Galley</i>	
ANGULAR +/-	APPROVED BY <i>[Signature]</i>	
TITLE Final Assembly		
DATE 3/2/04	DRAWING NUMBER 3489	