
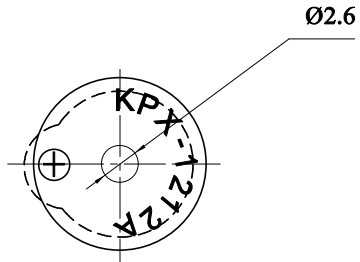


受 控

## SPECIFICATION

- 1. Rated Voltage ..... 12VDC
- 2. Operating Voltage ..... 9~15VDC
- 3. Max. Rated Current ..... 30mA/12VDC
- 4. Min. Sound Pressure Level ..... 88dB/10cm
- 5. Resonant Frequency ..... 2300±300Hz
- 6. Response Time ..... 50ms
- 6. Case Material ..... PBT
- 7. Operating Temperature ..... -25~+70°C
- 8. Store Temperature ..... -30~+80°C
- 9. Weight ..... 2g

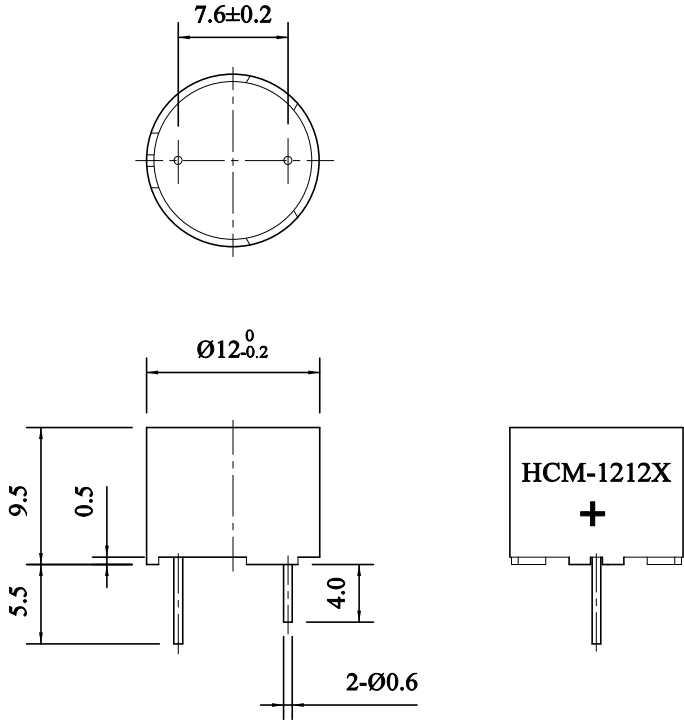

				<b>KEPO</b> NINGBO KEPO ELECTRONIC CO.,LTD <a href="http://www.chinaacoustic.com">http://www.chinaacoustic.com</a>	
				<b>Magnetic Buzzer QUARTZ-1 HCM1212X</b>	
No.	DESCRIPTION	APPROVED	DATE		
TOLERANCES UNLESS NOTED OTHERWISE X * XX * XXX * 90° FORMED ±0.2° ANGLES ±1°		APPROVALS		DATE	
		DRAWN	CHECKED	APPROVED	
		胡治健			
		FIRST ANGLE PROJECTION		18.04.17	
		UNIT	DWG NO.	SCALE	SHEET
		mm	OEM2578	NOT TO SCALE	VER 1.2