

规格书编号

SPEC NO: HDF1770ES6SP01

产品规格书

SPECIFICATION

CUSTOMER 客户: _____

PRODUCT 产品: _____ SAW FILTER _____

MODEL NO 型号: _____ HDF1770E-S6 _____

MARKING 印字: _____ HDF6G52 _____


PREPARED 编制: _____ CHECKED 审核: _____

APPROVED 批准: _____ D A T E 日期: _____ 2013-12-19 _____

客户确认 CUSTOMER RECEIVED:		
审核 CHECKED	批准 APPROVED	日期 DATE

无锡市好达电子有限公司
Shoulder Electronics Limited

1. Package Dimension

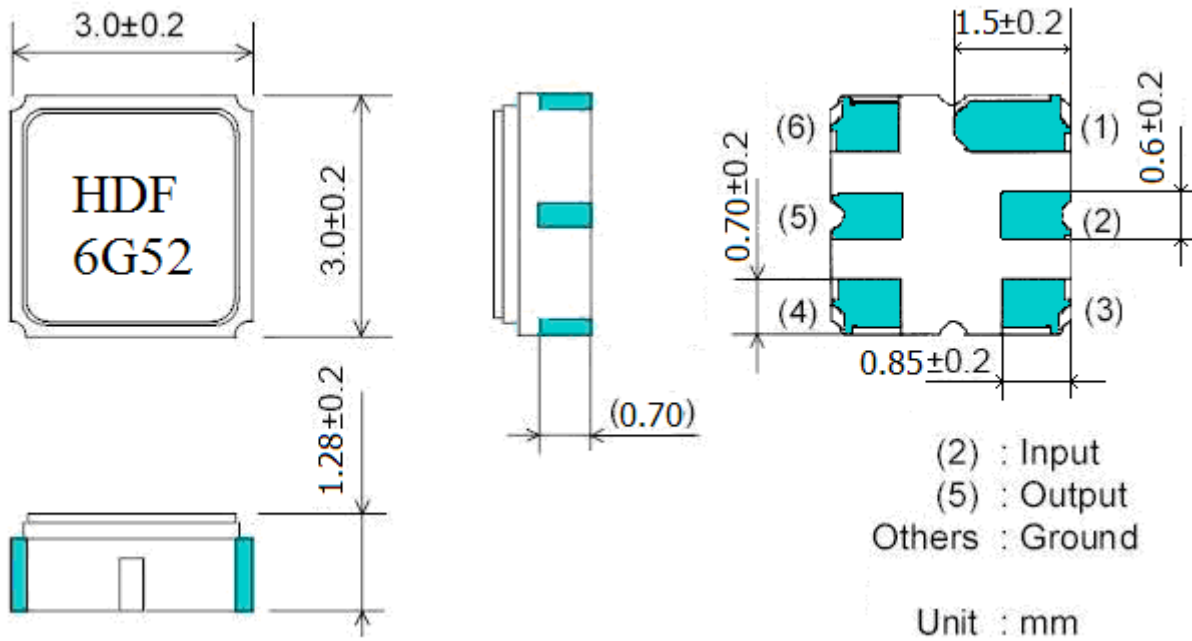

2. Performance


2.1 Maximum Rating

Items	Rating	unit
Maximum Working Power	10	dBm
Operating Temperature Range	-40 ~ +85	°C
Storage Temperature Range	-40 ~ +85	°C

2.2 Electronic Characteristics

	Unit	Minimum	Typical	Maximum
Center Frequency Fc	MHz	-	1770	-
Insertion Loss (In 1755~1785 MHz)	dB		2.5	3.5
Amplitude Ripple (In 1755~1785 MHz)	dB		0.5	1.5
VSWR (In 1755~1785 MHz)			2.0	
Attenuation				
0.3~1500 MHz	dB	30	35	-
1500~1700 MHz		25	30	
1840~2000 MHz		20	25	
2000~3000 MHz		25	40	
Input/Output Impedance	Ohms		50	

2.3 Frequency Characteristics

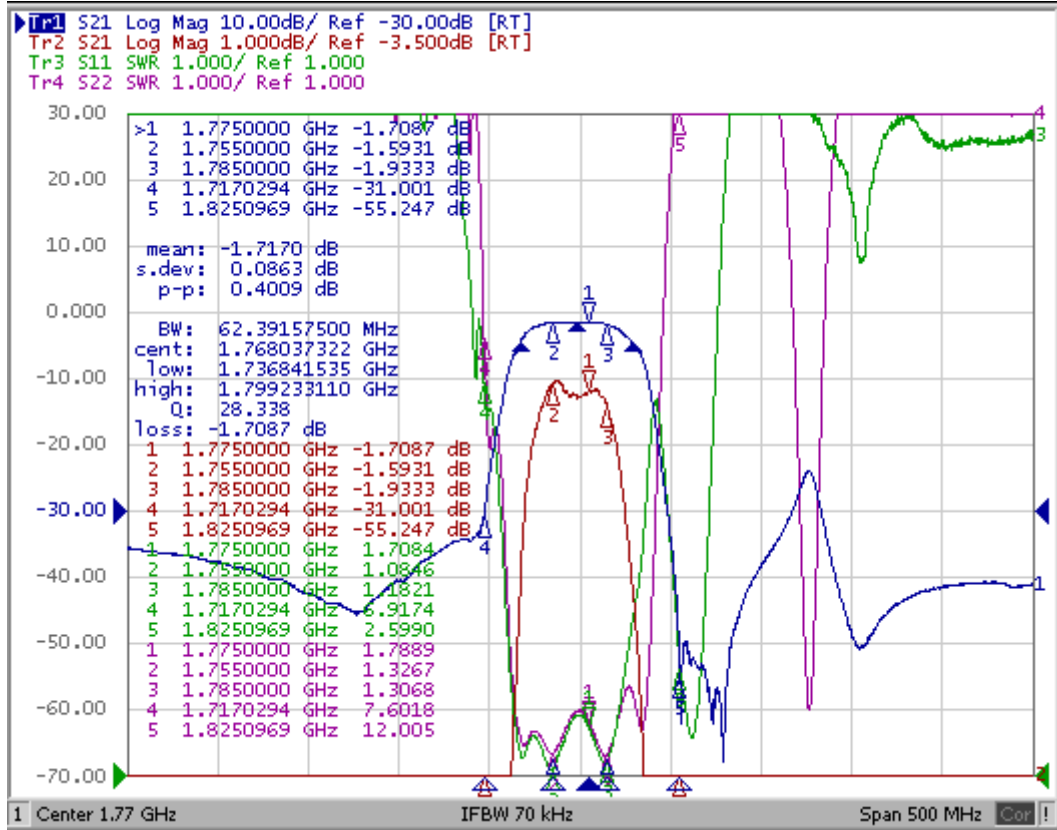

3. Test Circuit

