

# DYNAMIC RECEIVER

## Shape


KDR-0942  
KDR-0942P1  
KDR-0942P3




Model Number	KDR-0942	KDR-0942P1	KDR-0942P3
Max. Input Power (W)	0.1@White Noise for 1 Minute		
Impedance ( $\Omega$ )	150 $\pm$ 20%@1KHz		
Sound Pressure Level (dB)	88 $\pm$ 3dB@1KHz 60mV with IEC318 Coupler	112 $\pm$ 3dB@1KHz 1.0V with IEC318 Coupler	112 $\pm$ 3dB@1KHz 1.0V with IEC318 Coupler
Frequency Range (Hz)	250 ~ 4,000	300 ~ 5,000	300 ~ 5,000
Operating Temperature ( $^{\circ}$ C)	-20 ~ +55	-40 ~ +55	-40 ~ +55
Weight (Gram)	2.0		
Material	ABS UL-94M 1/16" HB		

## Dimension


KDR-0942

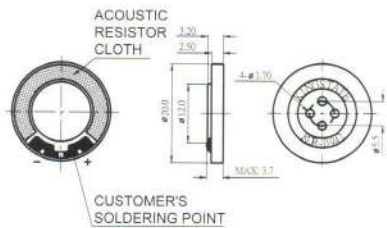

KDR-0942P1

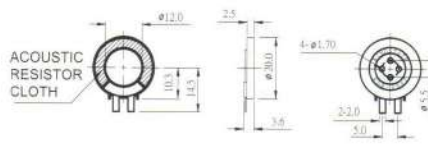

KDR-0942P3

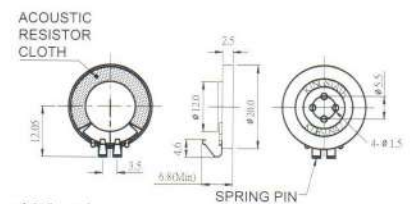


- Note: 1. The thickness of terminal is 0.4mm  
2. The surface of terminal to be tin and gold plated (min of 0.3  $\mu$ m)  
3. Material of terminal


Tol:  $\pm$ 0.5 Unit: mm

## Characteristic

KDR-0942

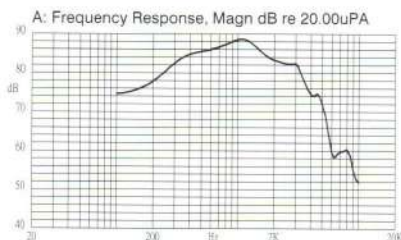

KDR-0942P1

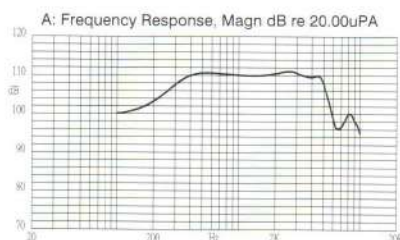

KDR-0942P3

