

MICRO SPEAKER (ROUND TYPE)


Shape

KDS-29008



Model Number	KDS-29008
Rated Input (W)	0.1
Maximum Input (W)	0.2
Impedance (Ω)	$8 \pm 15\%$ @1KHz1.0V
Rated Frequency (Hz)	$650 \pm 20\%$ @1.0V
Sound Pressure Level (dB)	88 ± 3 dB(0.1W/10cm), 78 ± 3 dB(1W/1m)@1.0K, 1.2K, 1.5K, 2.0KHz
Frequency Range (Hz)	Fo---4K
Magnet (mm)	$\phi 16.0 \times 7 \times 5$ Ferrite
Operating Temperature ($^{\circ}$ C)	-20 ~ +55
Weight (Gram)	8.0
Material	ABS UL-94 1/16" HB

Dimension

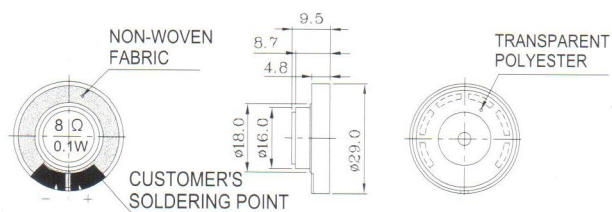

Tol : ± 0.3 Unit : mm

Characteristic

