


## MAGNETIC BUZZER


Material of Case: ABS  
 Colour: Black  
 Operating Temperature: -20°C +60°C  
 Storage Temperature: -30°C +70°C

### DIMENSIONS (in mm)

#### Leadwire Type




Top View




Side View


#### Pin Type



Top View



Side View

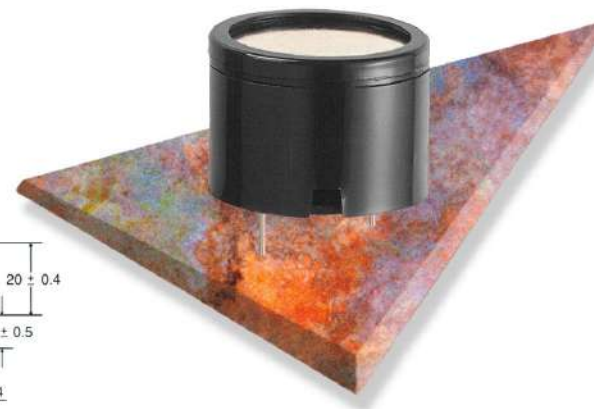

### Electrical Specifications

Model No.	2S3030	2S3060	2S3090	2S3120	2S3240	2S3415	2P3015	2P3030	2P3060	2P3090	2P3120	2P3240	2D3060	2D3090	2D3120
Operating Voltage	2-5	4-9	6-11	9-15	15-28	4-15	1-3	2-5	4-9	6-11	8-15	15-28	4-9	6-11	8-15
Rated Voltage (VDC)	3	6	9	12	24	12	1.5	3	6	9	12	24	6	9	12
Max. Current at Rated Voltage (mA)	35	35	40	40	25	15	5	8	10	10	15	20	35/10	35/15	40/15
Frequency (KHz)	2.8±0.2	2.8±0.2	2.8±0.2	2.8±0.2	2.8±0.2	2.8±0.2	2.8±0.2	2.8±0.2	2.8±0.2	2.8±0.2	2.8±0.2	2.8±0.2	2.8±0.2	2.8±0.2	2.8±0.2
Min. Sound Pressure at Rated Voltage (dBA/30cm)	85	90	90	95	95	90	70	73	78	80	85	85	85/70	85/75	90/80
Tone	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE	PULSE	PULSE	PULSE	PULSE	PULSE	PULSE	SINGLE/PULSE	SINGLE/PULSE	SINGLE/PULSE
Pulse Rate at Rated Voltage (Pulse/Sec)	NIL	NIL	NIL	NIL	NIL	NIL	2-7	2-7	2-7	2-7	2-7	2-7	2-7	2-7	2-7
Terminal	LEAD/PIN	LEAD/PIN	LEAD/PIN	LEAD/PIN	LEAD/PIN	LEAD/PIN	LEAD/PIN	LEAD/PIN	LEAD/PIN	LEAD/PIN	LEAD/PIN	LEAD/PIN	3 LEADS	3 LEADS	3 LEADS