


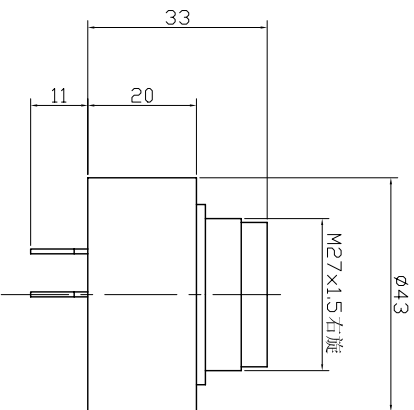


# SPECIFICATION

- 1. Rated Voltage ..... 24VAC
- 2. Operating Voltage ..... 6~30VAC
- 3. Max. Rated Current ..... 20mA at 24VAC
- 4. Min. Sound Pressure Level ..... 80dB at 24VAC/60cm
- 5. Tone Nature ..... Fast pulse
- 6. Resonant Frequency ..... 2.9±0.5KHz
- 7. Case Material ..... PC
- 8. Operating Temperature ..... -20~+80°C
- 9. Store Temperature ..... -30~+100°C
- 10. Weight ..... 40g



No.	DESCRIPTION	APPROVED	DATE	
TOLERANCES UNLESS NOTED OTHERWISE		APPROVALS	DATE	
XX ±	DRAWN			
XXX ±	CHECKED			
90° ANGLES ±°	APPROVED			
FIRST ANGLE PROJECTION			03.10.30	
<b>KEPO</b> NINGBO KEEP IMPROVING ELECTRONIC CO.,LTD <a href="http://www.chinaacoustic.com">http://www.chinaacoustic.com</a>		Piezo Buzzer <b>KPL-4312-24VAC</b>		
UNIT	DWG NO.	K P 3 . 8 4 0 . 1 1 3 . 0 4		
mm		SCALE	NOT TO SCALE	SHEET
				VER. 1.1