


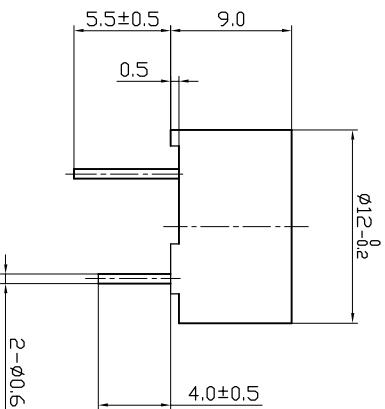


SPECIFICATION

- 1. Rated Voltage 1.5 V
- 2. Operating Voltage 1~2 V
- 3. Max. Rated Current 70mA
- 4. Coil Resistance 6.5±1 Ω
- 5. Coil Impedance 16 Ω
- 6. Min. Sound Pressure Level 80dB/10cm
- 7. Resonant Frequency 2400Hz
- 8. Case Material PBT
- 9. Operating Temperature -20~+70℃
- 10. Store Temperature -30~+80℃
- 11. Weight 2g



KEPO NINGBO KERO ELECTRONIC CO.,LTD http://www.chinaacoustic.com	
Magnetic Buzzer KPM-1201A	UNIT: mm DWGNO: KP3.840.676 SHEET: VER. 1.2
NO. DESCRIPTION APPROVED DATE DRAWN APPROVALS DATE CHECKED FIRST ANGLE PROJECTION	APPROVED 05.03.19 SCALE: NOT TO SCALE