

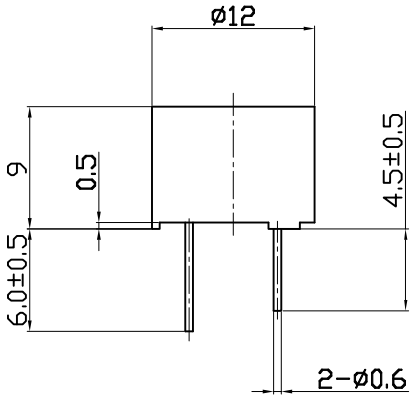



SPECIFICATION

1.Rated Voltage .....1.5 V
2.Operating Voltage .....1~2 V
3.Max.Rated Current 10mA
4.Coil Resistance ..... 45±5 Ω
5.Coil Impedance .....125 Ω
6.Min.Sound Pressure Level 70dB/10cm
7.Resonant Frequency 2400Hz
8.Case Material ..... PBT
9.Operating Temperature ..... -20～+70℃
10.Store Temperature ..... -30～+80℃
11.Weight 2g

No.	DESCRIPTION	APPROVED	DATE

TOLERANCES UNLESS NOTED OTHERWISE
.X ±
.XX ±
.XXX ±
90° FORMED ANGLES +2° -1°
FIRST ANGLE PROJECTION

APPROVALS	DATE
DRAWN	
CHECKED	
APPROVED	05.03.21

KEPO NINGBO KEPO ELECTRONIC CO.,LTD
http://www.chinaacoustic.com

Magnetic Buzzer
KPM-1201A6

UNIT	DWG NO.		
mm	KP3.840.682		
SCALE NOT TO SCALE	SHEET	VER 1.0	