
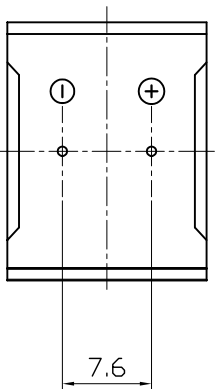
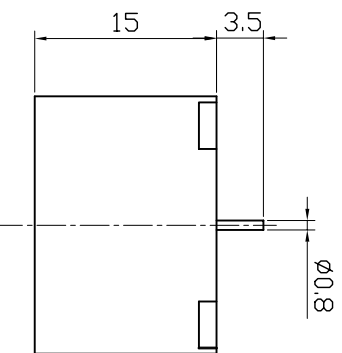


# SPECIFICATION

- 1. Rated Voltage ..... 6VDC
- 2. Operating Voltage ..... 4~8VDC
- 3. Max. Rated Current ..... 25mA at 6VDC
- 4. Resonant Frequency ..... 400±100Hz
- 5. Min. Sound Pressure Level..... 75dB at 6VDC/20cm
- 6. Case Material ..... ABS
- 7. Operating Temperature ..... -20~+60℃
- 8. Store Temperature ..... -30~+70℃
- 9. Weight ..... 10g

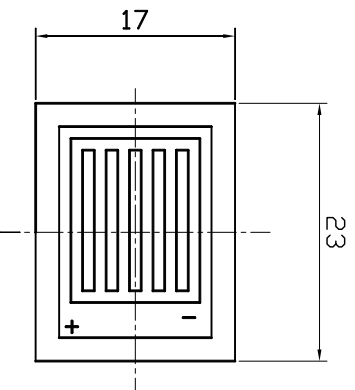

No.	DESCRIPTION	APPROVED	DATE	<b>KEPO</b> NINGBO KEEP IMPROVING ELECTRONIC CO.,LTD <a href="http://www.chinaacoustic.com">http://www.chinaacoustic.com</a>
TOLERANCES UNLESS NOTED OTHERWISE: mm ± ° ±	APPROVALS	DATE		
90° ANGLES ±° FIRST ANGLE PROJECTION	DRAWN			
	CHECKED			UNIT mm
	APPROVED	03.09.01		DWG NO. KP3.840.634
				SHEET
				VER 1.1