
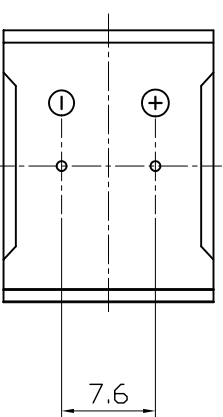
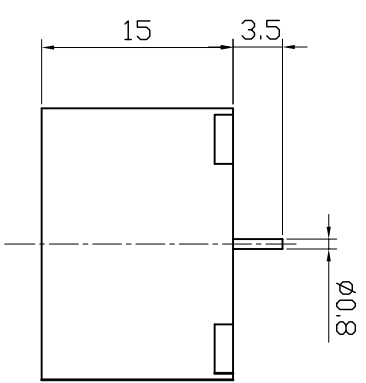


# SPECIFICATION

- 1. Rated Voltage ..... 12VDC
- 2. Operating Voltage ..... 9~15VDC
- 3. Max. Rated Current ..... 25mA at 12VDC
- 4. Resonant Frequency ..... 400±100Hz
- 5. Min. Sound Pressure Level..... 75dB at 12VDC/20cm
- 6. Case Material ..... ABS
- 7. Operating Temperature ..... -20~+60℃
- 8. Store Temperature ..... -30~+70℃
- 9. Weight ..... 10g

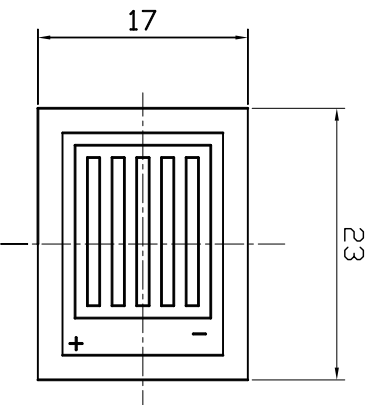

No.	DESCRIPTION	APPROVED	DATE	<b>KEPO</b> NINGBO KEEP IMPROVING ELECTRONIC CO.,LTD <a href="http://www.chinaacoustic.com">http://www.chinaacoustic.com</a> Magnetic Buzzer KPMB-2312P			
TOLERANCES UNLESS NOTED OTHERWISE		APPROVALS	DATE				
XXX.X	XXX.X	CHECKED					
90° ANGLES ±1°		APPROVED	03.09.01	UNIT	DWG NO.	KPB.840.636	
FIRST ANGLE PROJECTION				SCALE	SHEET	VER 1.1	