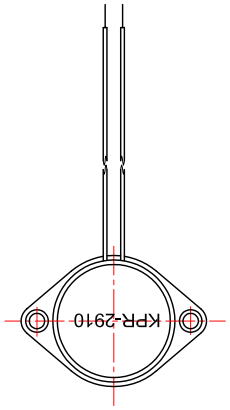



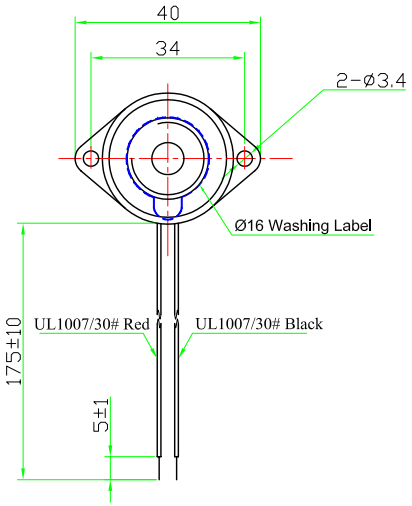

Specifications

1.Rated Voltage.....12Vp-p Square Wave
2.Max.Allowable Voltage.....30Vp-p Square Wave
3.Max. Rated Current.....3mA at 2.9KHz/12Vp-pSquare Wave
4.Min. Sound Pressure Level.....90dB at 2.9KHz/12Vp-pSquare Wave/30cm
5.Resonant Frequency.....2.9±0.5KHz
6.Capacitance at 120Hz.....30000pF±30%
7.Case Material.....ABS
8.Operating Temperature.....-20~+60℃
9.Store Temperature.....-30~+70℃
10.Weight.....10.2g

No.	DESCRIPTION	APPROVED	DATE

TOLERANCES UNLESS NOTED OTHERWISE
.X ±
.XX ±
.XXX ±
90° FORMED ±2° ANGLES ±1°
FIRST ANGLE PROJECTION

APPROVALS	DATE
DRAWN	
CHECKED	
APPROVED	08.05.24

KEPO NINGBO KEPO ELECTRONIC CO.,LTD
http://www.chinaacoustic.com

Piezo Transducer Quartz-1
KPR-2910

UNIT	DWG NO.	
mm	OEM2961	
SCALE NOT TO SCALE	SHEET	VER 1.0