
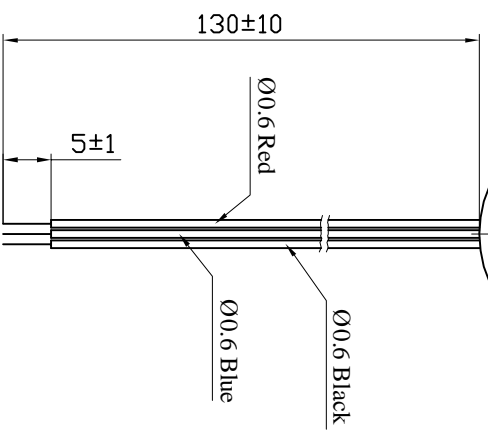




Specifications

1. Rated Voltage..... 6 VDC
2. Operating Voltage..... 3~18 VDC
3. Max. Rated Current..... 5mA at 6 VDC
4. Min. Sound Pressure Level..... 80dB at 6VDC/30cm
5. Resonant Frequency..... 4.0±0.5KHz
6. Tone Nature..... Continuous
7. Case Material..... ABS
8. Operating Temperature..... -20~+60℃
9. Store Temperature..... -30~+70℃
10. Weight..... 2g



KEPO NINGBO KEPO ELECTRONIC CO.,LTD http://www.chinaacoustic.com		KPR3-2313A	
No.	DESCRIPTION	APPROVED	DATE
<small>NO. OF OPERATING HOURS X X X X 90° FORWARD 180° FORWARD TYPICAL DIMENSIONS</small>		<small>DRAWN CHECKED APPROVED</small>	<small>DATE</small>
UNIT: mm		SCALE: 1:1	DATE: 05/16/20
DRAWING NO: KPR3-2313A		SHEET: 1	VER: 1.0