


Speaker Specification

Customer's Model No.		Customer	QUARTZ-1	
Kepo Model No.	KPSP5085PF-150/0.25A	Size	Φ 50mm	No. J22308
No.	Item	Specification	Test Condition	
1	Impedance	150 Ω ± 15%	at 1000Hz	
2	Resonant Fr. (f ₀)	600Hz ± 20%		
3	Frequency Range	F0-5.0KHz		
4	Rated Power	0.25W		
5	Max Power	0.3W		
6	S.P.L.	80 ± 3dB	0.1W / 0.1M at 1.0kHz	
7	Distortion	Max 5%	at rated power 1.0kHz	
8	Sweep Test	must be normal	at sine wave 6.12V	
9	Load Test	after test meet item 8	rated noise power, 24 Hrs.	
10	Heat Test	after test meet item 8	50 ± 2°C 5Hrs.	
11	Cold Test	after test meet item 8	-20 ± 2°C 5Hrs.	
12	Humidity Test	after test meet item 8	40 ± 2°C, 90/95%R.H. 5Hrs.	
13	Weight			
14	Polarity Test	When supplied plus D.C. voltage to (+) terminal, the cone must move to forward.		
15	Note			

Dimensions:

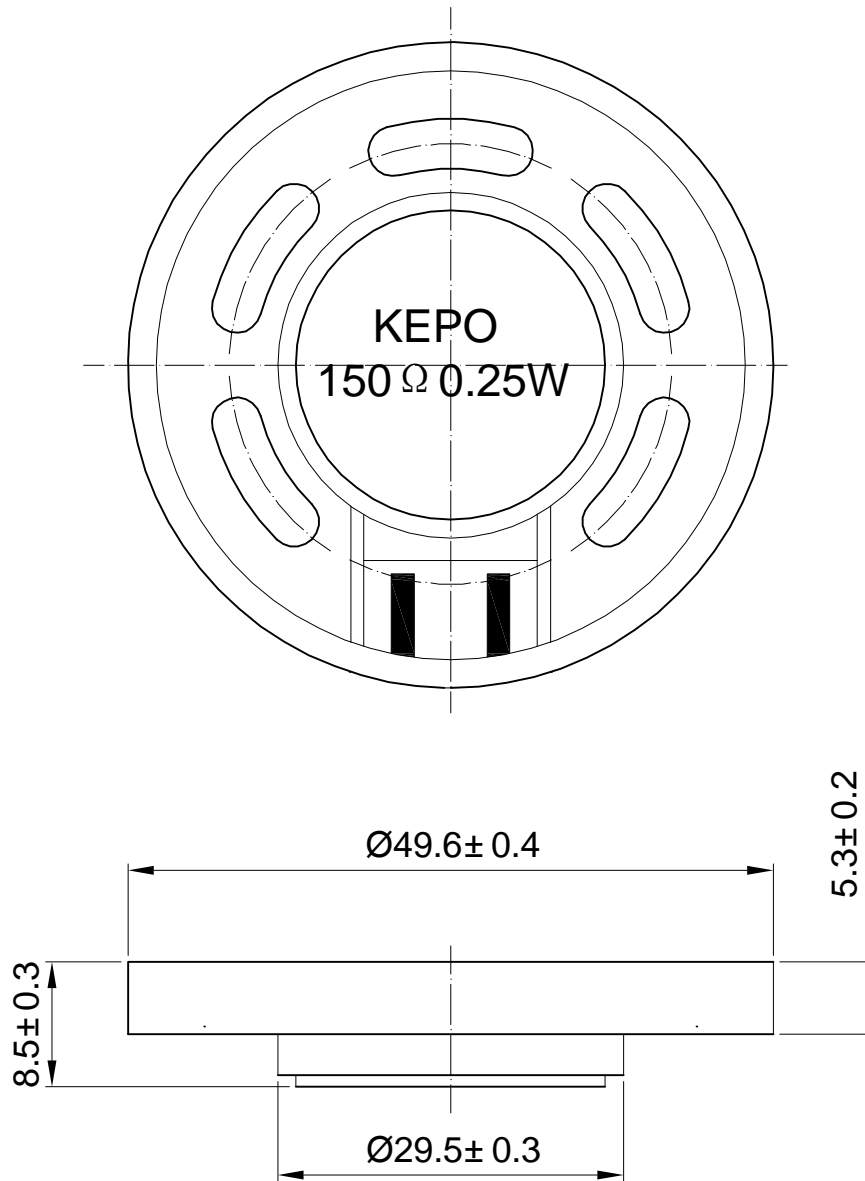

FIRST ANGLE PROJECTION

UNIT : mm
Tolerance : ± 0.2