


# Speaker Specification

受控

Customer's Model No.			Customer	QUARTZ	
Kepo Model No.		KPSP5780MN-08/0.5F	Size	Φ 57mm	No. J22576.01
No.	Item	Specification	Test Condition		
1	Impedance	8Ω± 15%	at 1.0kHz		
2	Resonant Fr. (f <sub>0</sub> )	300Hz± 20%			
3	Frequency Range	F0-10KHz			
4	Rated Power	0.5W			
5	Max Power	0.6W			
6	S.P.L.	90± 3dB	0.1W/0.1M at 0.8,1.0,1.2,1.5KHz		
7	Distortion	Max 5%	at rated power 1.0kHz		
8	Sweep Test	must be normal	at sine wave 2V		
9	Load Test	after test meet item 8	rated noise power, 24 Hrs.		
10	Heat Test	after test meet item 8	50± 2℃ 5Hrs.		
11	Cold Test	after test meet item 8	-20± 2℃ 5Hrs.		
12	Humidity Test	after test meet item 8	40± 2℃,90/95%R.H. 5Hrs.		
13	Weight				
14	Polarity Test	When supplied plus D.C. voltage to (+) terminal, the cone must move to forward.			
15	Note				

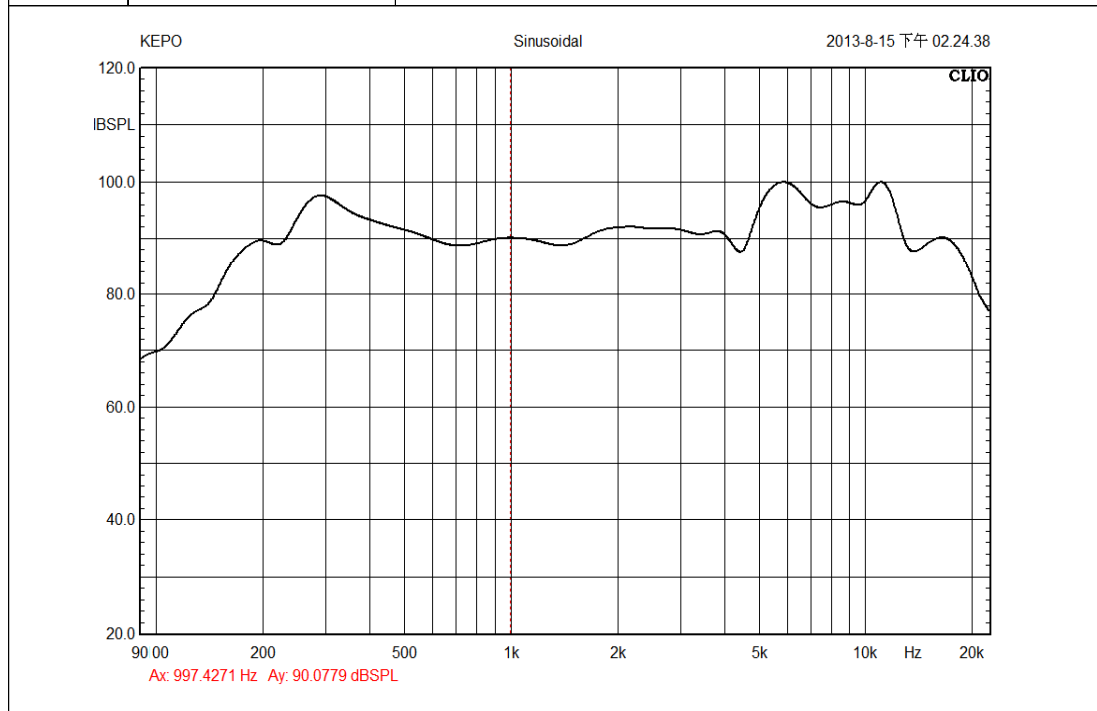

Ningbo Kepo Electronics Co.,Ltd.

<http://www.chinaacoustic.com>

# Specification for Speaker

Page

2/2

Revision No.



1.0

Model No. :

Drawing No.

KFC

## 2. Dimensions

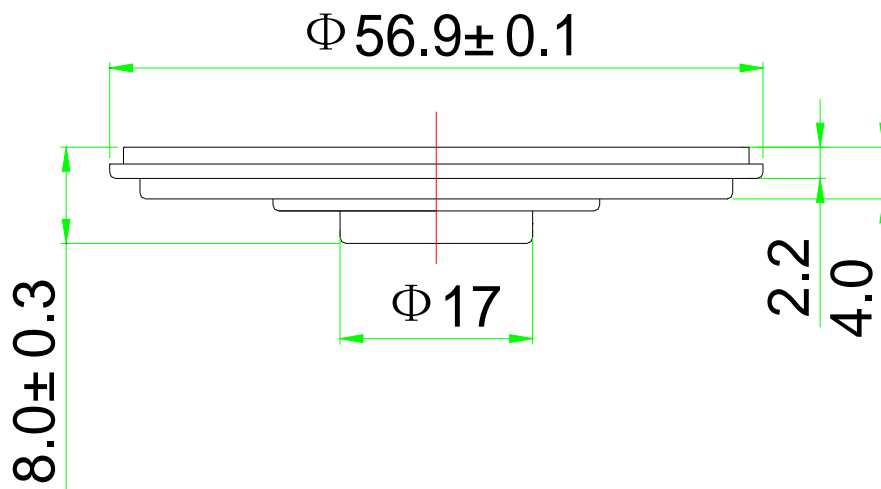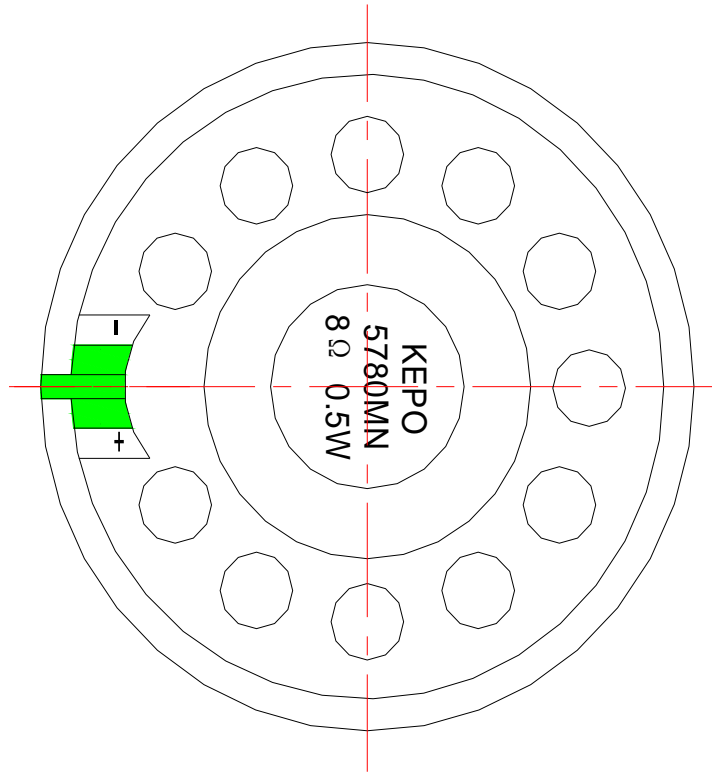

FIRST ANGLE PROJECTION

UNIT : mm

Tolerance :  $\pm 0.2$

Ningbo Kepo Electronics Co.,Ltd.

<http://www.chinaacoustic.com>

Ningbo Kepo Electronics Co.,Ltd.

<http://www.chinaacoustic.com>