


1 2 3 4 5 6 7 8

A




B

SPECIFICATION


- 1. Rated Voltage 5 V
- 2. Operating Voltage 4~8 V
- 3. Max. Rated Current 40mA
- 4. Coil Resistance 45±5 Ω
- 5. Coil Impedance 80 Ω
- 6. Min. Sound Pressure Level 85dB/10cm
- 7. Resonant Frequency 1953Hz
- 8. Case Material PBT
- 9. Operating Temperature -20~+70°C
- 10. Store Temperature -30~+80°C
- 11. Weight 2g

C

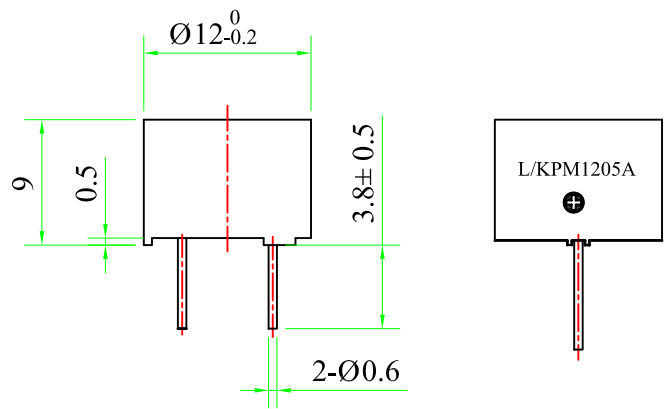

D

E

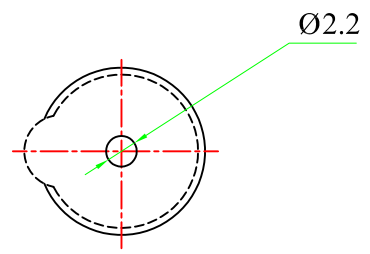

F

				KEPO NINGBO KEPO ELECTRONIC CO.,LTD http://www.chinaacoustic.com	
				Magnetic Buzzer	
				L/KPM1205A	
No.	DESCRIPTION	APPROVED	DATE		
<small> TOLERANCES UNLESS NOTED OTHERWISE .X = .XX = .XXX = 90° FORMED +2° ANGLES ±° FIRST ANGLE PROJECTION </small>		APPROVALS	DATE	UNIT	DWG NO.
		DRAWN		mm	KP3.840.743
		CHECKED		SCALE	SHEET
		APPROVED	04.10.25	NOT TO SCALE	VER 1.0

1 2 3 4 5 6 7 8