



SPEC NO.: CU-212SMD

Specification

TO:STE508

Model Name: Crystal Oscillator

PART NO: SOC5032-12.288M-50-3.3V-A

CUSTOMER PART NO.:

APPROVAL SHEET

	Yes
Approved?	No.
Customer's comments are welcomed here.	
Pls return this copy as a certificate of your approval by email.	
Approved By	Date: _____

STRONG ELECTRONICS&TECHNOLOGY LIMITED

Tel:86-755-84528985 Fax: 86-755-84528986

Email:info@strongetronics.net

www.strongetronics.net

History Record

Date	Part No.	SPEC No.	Description.	Remarks.
	ISO9001:2000 ISO14001:2004	Approved by	Check by	Design by
		May-15-2009	May-10-2009	Jan-16-2009
Reversions	Total Page	<i>Xu gang dong</i>	<i>Liu jun</i>	<i>Wang kon</i>
CU-02SMD				

SPECIFICATION


1. RANGE:

This specification shall cover the characteristics of crystal oscillator with Strong's P/N: SOC5032-12.288M-50-3.3V-F

2. ELECTRICAL SPECIFICATION

ITEM	SPECIFICATION
Package	S5032
Output Signal Waveform	CMOS
Frequency Range	12.288MHz
Current Consumption	30mA Max
Frequency Stability	± 50ppm Max
Load	15pF
Output Symmetry	45~55 (at 50%VDD)
Rise Time/Fall Time	10nS Max.
Temperature Range	Operating: -20~+70°C Storage: -45°C to 85°C
Supply Voltage	3.3V±5%
Output Level	1V Max
Aging	± 3ppm/year Max

3. DIMENSION

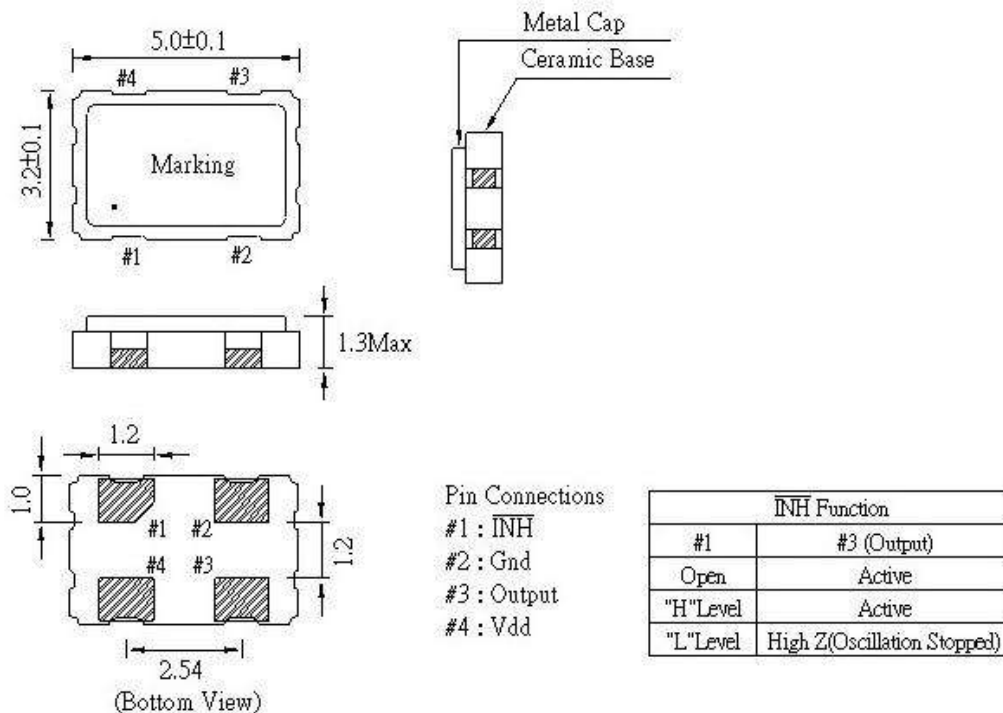

4. MECHANICAL SPECIFICATION

1) Terminal Strength

* Lead pulling test

Conditions:	Load	907.2 gram
	Direction	To the downward
	Duration of applied force	5 seconds
Results:	There should be no distortion in appearance.	

* Lead bending test

Conditions:	Load	453.6 gram
	Bending angle	90° to normal position
	Rate of bending	3 seconds in each cycle
	Number of bending	3
Results:	There should be no distortion in appearance.	

2) Lead solder ability test

Conditions:	Dipping in solder(+260°C ± 5°C)for 3 seconds
Results:	More than 95% of surface being tested should be coated uniformly with solder.

3) Vibration test

Conditions:	Frequency	10 – 55Hz
	Amplitude	0.762mm
	Sweep	1.0 minute
	Duration	2 hours
Results:	Frequency and wave form of tested products must remain within specifications.	

4) Drop test

Conditions:	Method of drop	Natural drop
	Dropping floor	Hard wood board
	Height	30cm
	Number of drops	3 times
Results:	Frequency and wave form of tested products must remain within specifications.	

5. ENVIRONMENTAL SPECIFICATION

1) Temperature test

* Temperature cycling test

Conditions: Steps of cycle

- 1) At -55°C, 30 minutes
- 2) At +25°C, 10 - 15 minutes
- 3) At +105°C, 30 minutes
- 4) At +25°C, 10 - 15 minutes

Number of cycles 3 times

Results: Frequency and wave form of tested products must remain within specifications.

* Low Temperature test

Conditions: Temperature -45°C ± 2°C
Length of test 96 hours

Results: There should be no stain on surface of products.
Frequency and wave form of tested products must remain within specifications.

2) Aging test

Conditions: Temperature +105°C ± 5°C
Length of test 96 hours

Results: Deviation of frequency must be less than ± 3ppm

3) Salt spray test

Conditions: Temperature +35°C ± 2°C
Length of test 48 hours
NaCl % 5%

Results: There should be no stain on surface of products.

4) Humidity test

Conditions: Temperature +40°C ± 2°C
Relative humidity 90 - 95%
Length of test 96 hours

Results: a. Insulation resistance must be 500 MΩ / 100 Vac. minimum
b. Resistance and wave form must remain within specifications.