

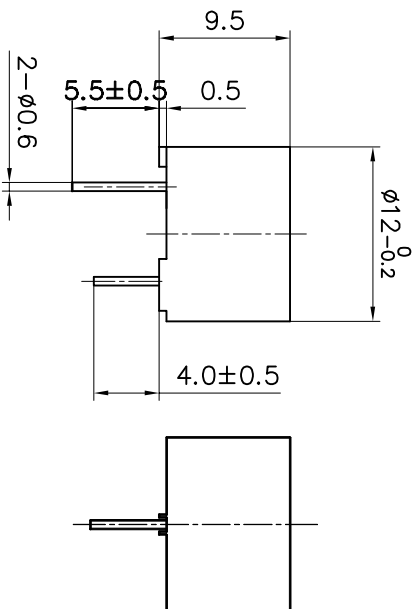


受 控

SPECIFICATION

1. Rated Voltage 5V
2. Operating Voltage 4-8V
3. Max. Rated Current 40mA
4. Resonant Frequency 2400Hz
5. Min. Sound Pressure Level..... 85dB/10cm
6. Coil Resistance..... 45±5 Ω
7. Coil Impedance 80 Ω
8. Case Material PBT
9. Operating Temperature -20~+70°C
10. Store Temperature -30~+80°C
11. Weight 2g

备注：对产品的插针进行搪锡。



Compliance with ROHS		KEPO NINGBO KEPO ELECTRONIC CO.,LTD http://www.chinaacoustic.com	
No.	不印SGS	DRAWN	Magnetic Buzzer 巨联 SUT-G1205A1-K7776
DESCRIPTION	描述波	CHECKED	UNIT
APPROVALS	DATE	APPROVED	mm
DATE	DATE	SCALE	
11.03.08	11.03.08		
11.03.08	11.03.08		
11.03.08	11.03.08		
DRAWN 胡浩波		DWG NO	
CHECKED 刘伟兵		OEM7776R	
APPROVED 梁树梁		SHEET	
DATE 11.03.08		VER 1.1	