SPECIFICATION

FOR APPRONAL

Customer :

Product Name : Magnetic Buzzer

Model Name : VSMB2606L130

Drawing No. : VS20230814017

Signature of Voise

Approved by	Checkde by	Issued by	Date

福爱斯电子有限公司
VOISE ELECTRONICS CO.,LTD.
Address:No 96 Mogao Dongqian Lake Industial Area ningbo,China,
Tel:0086-0574-87773030;Fax:0086-0574-87471600 P.C.315121
http://www.nbvoise.com Email:sales@nbvoise.com

Table of contents

1. Revision
2. Scope
3. General Characteristics
4. Electrical and Acoustic Characteristics.
5. Dimensions
6. Packing

1. Revision

Rev.No.	Date	Page	Description of Revision
1.0	2023/8/14		Preliminary

2. Scope

This specification is applied to the siren used for sounder in alarm systems,Please contact us when using this product for any other applications than described in the above.

3. General

3.1 Out-Diameter : 26 mm

3.2 Height : 15.2 mm

3.3 Weight : 12 ±3g

3.4 Operating Temperature range:

-20~+60℃ without loss of function

3.5 Store Temperature range:

-30~+70℃ without loss of function

4. Electrical and Acoustic Characteristics.

Test condition : 15 ~ 35 ℃, 25% ~ 85% RH, 860~1060 mbar

No	Items	Specification
1	Rated Voltage	6V DC
2	Working Voltage	4-8VDC
3	Max Rated Current	30mA/6VDC
4	Min Sound Preesure Level	80dB/6VDC/20cm
5	Resonant Frequency	400±100Hz
6	Housing Material	ABS
7	Color	Black

5. Dimensions

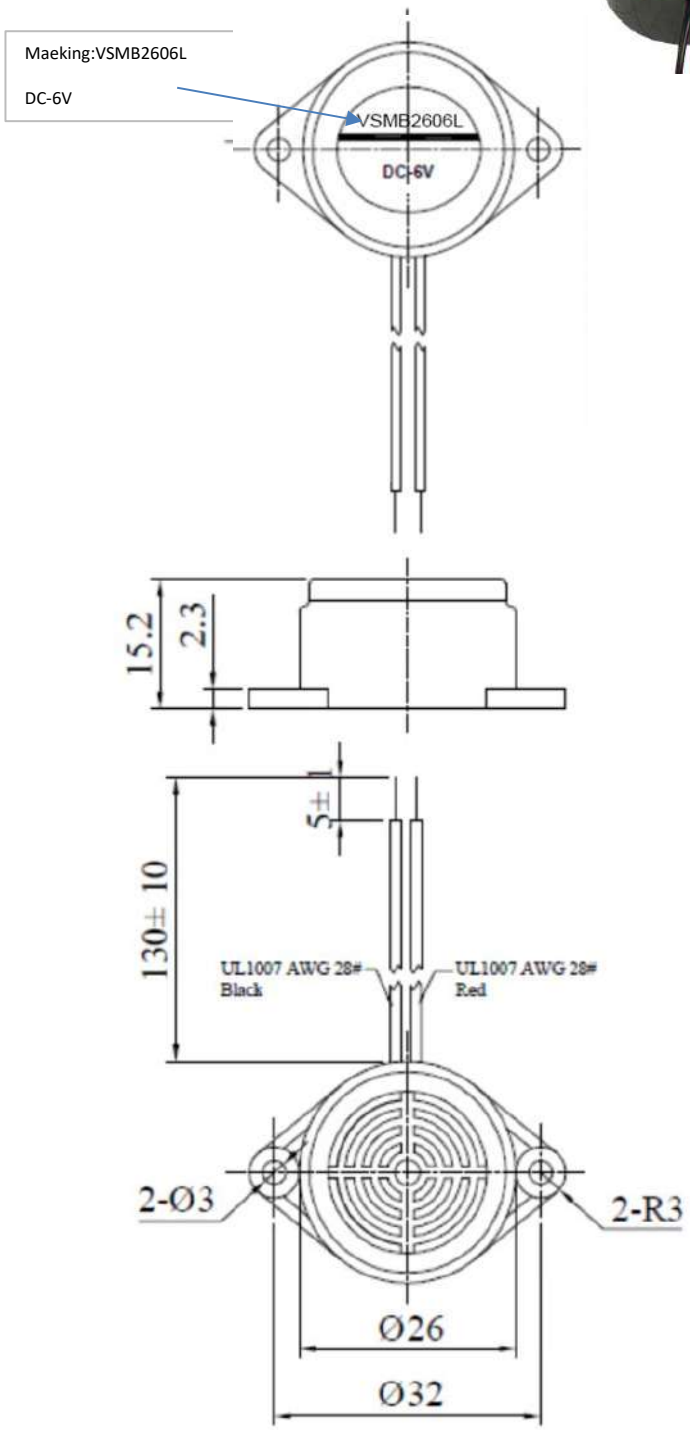

FIRST ANGLE PROJECTION

UNIT : mm

Tolerance : ±1.5

6. Packing

Each minimum package unit of products shall be in a carton box and it shall be clearly marked with Part Number ,quantity and outgoing inspection number.

There shall be no mechanical damage on products during in storage.

Total:200 pcs per box

Size:41.5x27x31cm