





YD78-12/P

Rated Impedance (Ω)	8 \pm 15%
Rated (Max) Power (W)	10 (15)
Resonance Frequency (Hz)	260 \pm 20%
Rated Freq. Range (Hz)	f. \sim 12000
Sound Pressure Level (dB/1m, 1w)	87 \pm 3
Weight (g)	109
Operating Temperature ($^{\circ}$ C)	-10 \sim +40




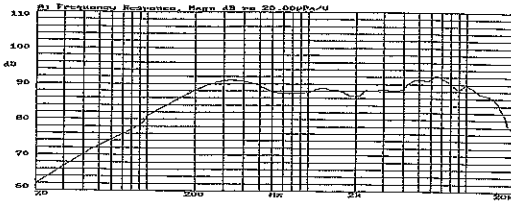


2







YD78-13

Rated Impedance (Ω)	8 \pm 15%
Rated (Max) Power (W)	0.5 (1)
Resonance Frequency (Hz)	260 \pm 20%
Rated Freq. Range (Hz)	f. \sim 5000
Sound Pressure Level (dB/1m, 1w)	87 \pm 2
Weight (g)	40
Operating Temperature ($^{\circ}$ C)	-10 \sim +40

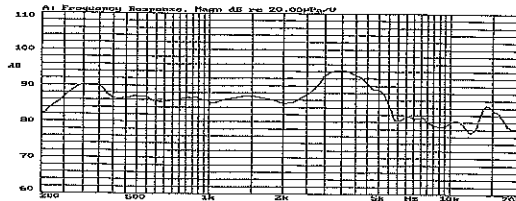

YD87-1B

Rated Impedance (Ω)	8 \pm 15%
Rated (Max) Power (W)	3 (5)
Resonance Frequency (Hz)	450 \pm 20%
Rated Freq. Range (Hz)	f. \sim 2000
Sound Pressure Level (dB/1m, 1w)	90 \pm 2
Weight (g)	330
Operating Temperature ($^{\circ}$ C)	-10 \sim +40

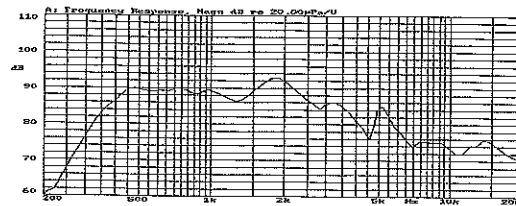

YD87-2B

Rated Impedance (Ω)	8 \pm 15%
Rated (Max) Power (W)	3 (5)
Resonance Frequency (Hz)	450 \pm 20%
Rated Freq. Range (Hz)	f. \sim 2000
Sound Pressure Level (dB/1m, 1w)	90 \pm 2
Weight (g)	330
Operating Temperature ($^{\circ}$ C)	-10 \sim +40

