
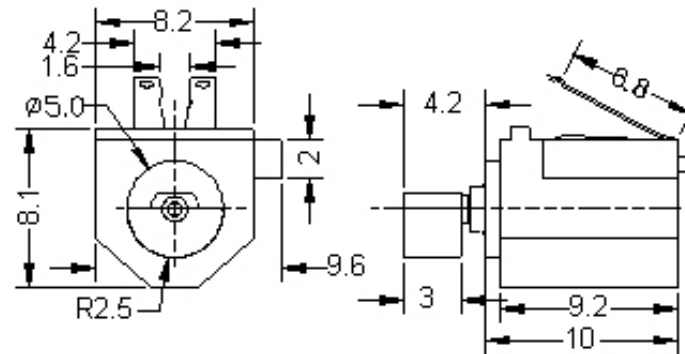
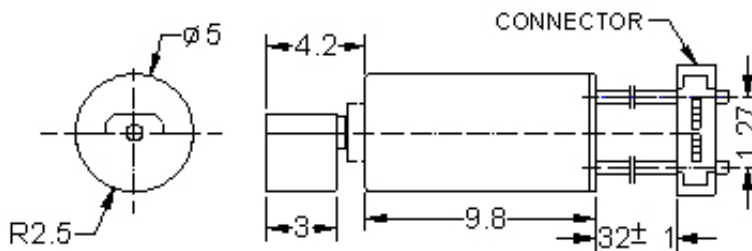
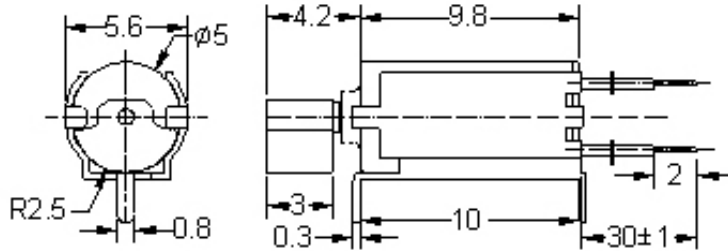


Dimensions

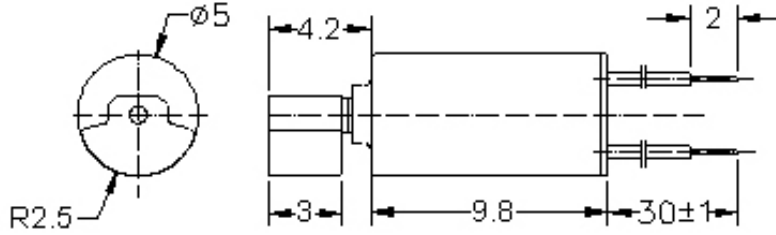

| Model | Rated Voltage | Operating voltage | Rated Current | Rated Speed | Starting Voltage | Stall current | Terminal Resistance | End play of Shaft | Weight(approx) |
|-------|---------------|-------------------|---------------|-------------|------------------|---------------|---------------------|-------------------|----------------|
| | V | V | mA | rpm | V | mA | Ω(approx) | mm | g |
| QX5 | 1.3 | 0.9-1.6 | 80Max | 10000±2000 | 0.85Max | 120Max | 12 | 0.1-0.3 | 1.7 |

► Dimensions of vibrator and holder can be tailor-made according to the customer's needs