
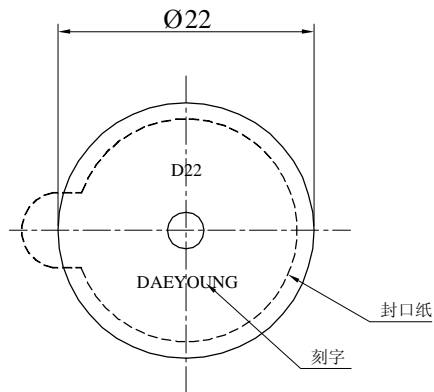


# SPECIFICATION

- 1. Rated Voltage ..... 9Vp-p Square Wave
- 2. Operating Voltage ..... 3~30Vp-p Square Wave
- 3. Max. Rated Current ..... 3mA/9Vp-p Square Wave/4KHz
- 4. Resonant Frequency ..... 4.0±0.5KHz
- 5. Min. Sound Pressure Level..... 90dB/9Vp-p Square Wave/10cm
- 6. Capacitance at 100Hz..... 15000pF±30%
- 7. Shell Material/Color ..... ABS/Original color
- 8. Operating Temperature ..... -20~+60°C
- 9. Store Temperature ..... -30~+70°C
- 10. Weight ..... 2.5g

备注：蜂鸣片涂绿。

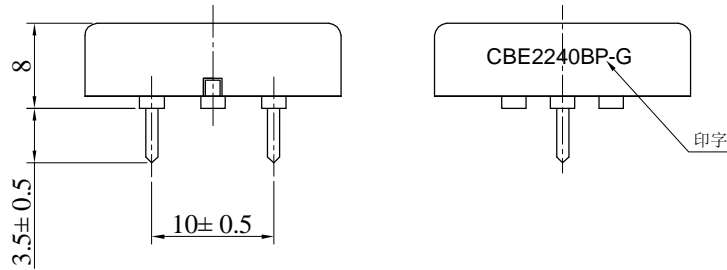

				<b>KEPO</b> NINGBO KEPO ELECTRONIC CO.,LTD <a href="http://www.chinaacoustic.com">http://www.chinaacoustic.com</a>	
No.		DESCRIPTION	APPROVED	DATE	Piezo Buzzer QUARTZ-1 LTD CBE2240BPW-G-2069
TOLERANCES UNLESS NOTED OTHERWISE: X . * XX . * XXX . * 90° FORMED ±2° ANGLES ±1° FIRST ANGLE PROJECTION		APPROVALS	DATE		
DRAWN		CHECKED	APPROVED	06.02.27	UNIT: mm DWG NO. OEM2069
SCALE		SHEET		VER 1.0	