

**ROHS COMPLIANT**

**APPROVAL SHEET**

Customer :

Part Number:

Part No.:

11425076800.0001

Holder :

OCXO-25

Frequency:

76.8MHz

Manufacturer:

Date:

2023/3/18

Prepared	Checked	Approved

**(For Customer Use)**

Acceptable	Non-Acceptable



**1. Scope**

This document describes technical guidelines of product [11425076800.0001](#)

**2. Electrical Characteristics**

<b>LVC MOS OUTPUT OCXO-25</b>						
<b>PARAMETER</b>	<b>SYMBOL</b>	<b>CONDITIONS</b>	<b>MIN</b>	<b>TYPE</b>	<b>MAX</b>	<b>UNIT</b>
Normal Frequency	$F_n$	SC	-	76.8	-	MHz
<b>Absolute maximum ratings</b>						
Maximum Supply Range	$V_{cc}$	-	-0.5	-	+5.5	V
Operating Temperature range	$T_A$	-	0	-	70	°C
Storage Temperature range	-	-	-55	-	125	°C
<b>Power</b>						
Operating Supply Voltage	$V_{cc}$	-	3.13	3.30	3.47	V
Turn-On Power	-	Nom Vcc	-	-	3.6	W
Steady state Power	-	$T_A=25^\circ\text{C}$	-	1.2	1.5	W
<b>Frequency Stability</b>						
Calibration	-	$T_A=25^\circ\text{C}$	-	$\pm 500$	$\pm 800$	ppb
Freq VS Temperature	$T_S$	$0^\circ\text{C}$ to $70^\circ\text{C}$ (ref to $25^\circ\text{C}$ )	-	-	$\pm 100$	ppb
Freq. VS Voltage	-	$V_{cc}=3.3\text{V}\pm 5\%$ ( $V_c$ =constant)	-	-	$\pm 20$	ppb
Freq VS Time (Aging)	-	Per day	-	-	$\pm 2$	ppb
	-	Per year	-	-	$\pm 100$	ppb
	-	10 years	-	-	$\pm 0.5$	ppm
Warm up time		to within $F \pm 1 \text{ E-7}$ frequency reached after 1 hour of continuous operation @ $25^\circ\text{C}$	-	-	5	minutes
<b>Electrical Frequency Control</b>						

Control Voltage Range	-	VC Transfer is positive monotonic	0	-	3.3	V
Center control voltage	$V_c$	-	-	1.65	-	V
Pulling Range	-	-	$\pm 0.6$	-	-	ppm
Input impedance (Zi)	-	-	100	-	-	K $\Omega$
EFC Linearity	-	-	-	-	$\pm 10$	%
<b>Output parameters</b>						
Output signal	-	-	HCMOS			
Output load	-	Output to ground	Load=15pF $\pm 10\%$			$\Omega$
Output level	$V_{OH}$	Load=15pF $\pm 10\%$ , Vcc=3.3V	2.97	-	-	VDC
	$V_{OL}$	Load=15pF $\pm 10\%$ , Vcc=3.3V	-	-	0.33	VDC
Rise/fall time	Tr/Tf	-	-	-	10	ns
Duty cycle	SYM	-	45	50	55	%
Spurious	-	-	-	-	-70	dBc
Reference Voltage	-	-	-	-	-	VDC
<b>Phase noise</b>						
-	-	10Hz	-	-85	-	dBc/Hz
	-	100Hz	-	-115	-	dBc/Hz
	-	1KHz	-	-145	-	dBc/Hz
	-	10KHz	-	-150	-	dBc/Hz
	-	100KHz	-	-155	-	dBc/Hz

### 3. Construction


#### 1. Oscillator enclosure seal:

Seam seal     resistance weld     cold weld

#### 2. crystal enclosure medium

nitrogen     vacuum     dry air

**4.Dimension:**

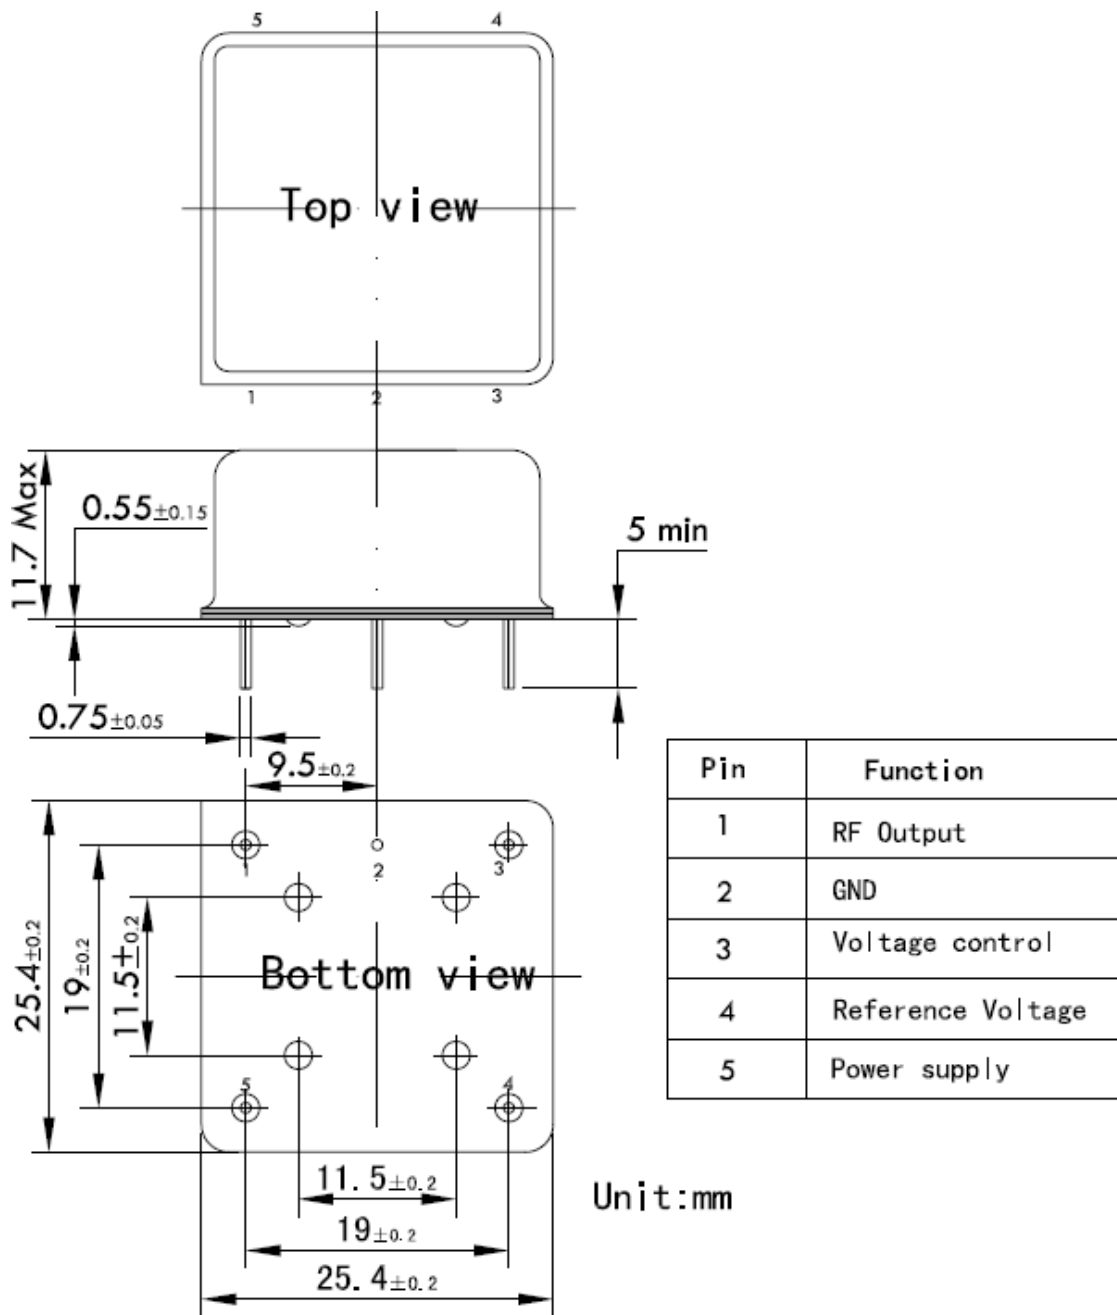


Unit:mm

LEAD TERMINATION FINISH: SOLDER COATED, 96.5/3.5 Sn/Ag


**5. Marking**

- Laser Marking
- Ink Marking

### 6. Packing Instruction

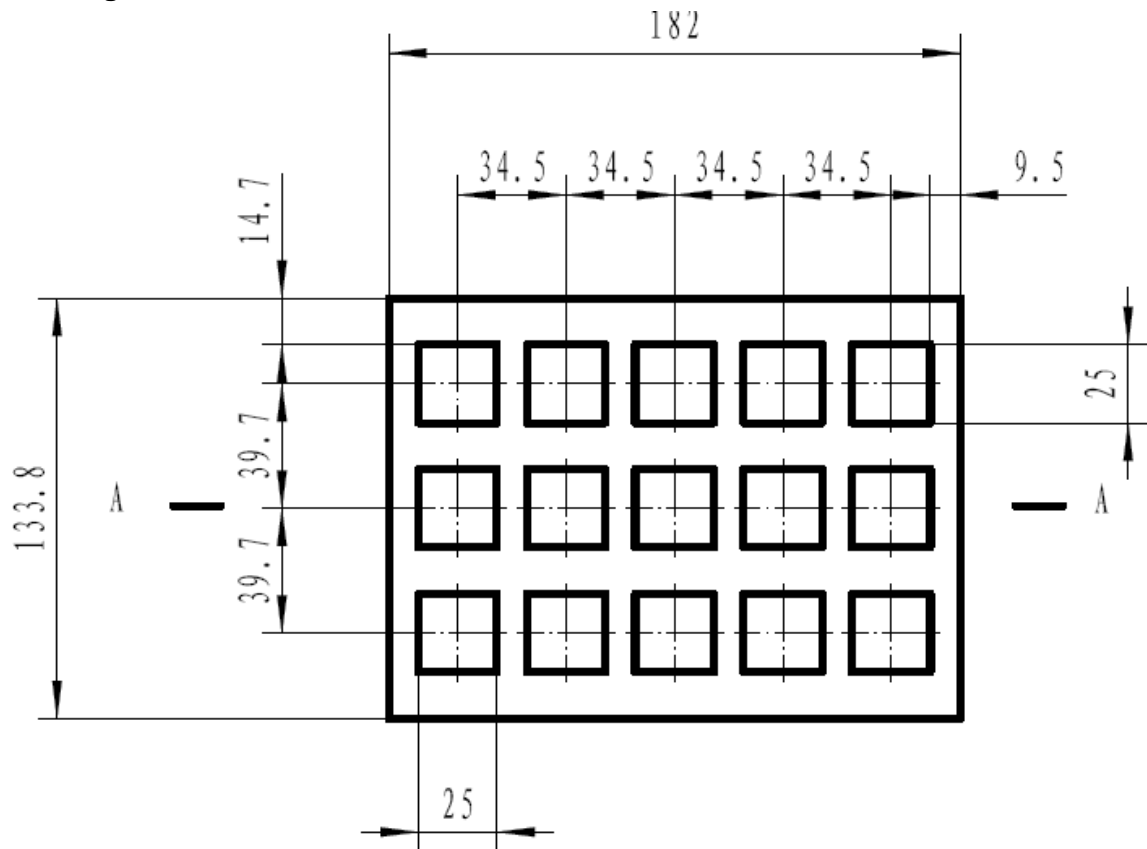

Trap Material: ESD sponge.

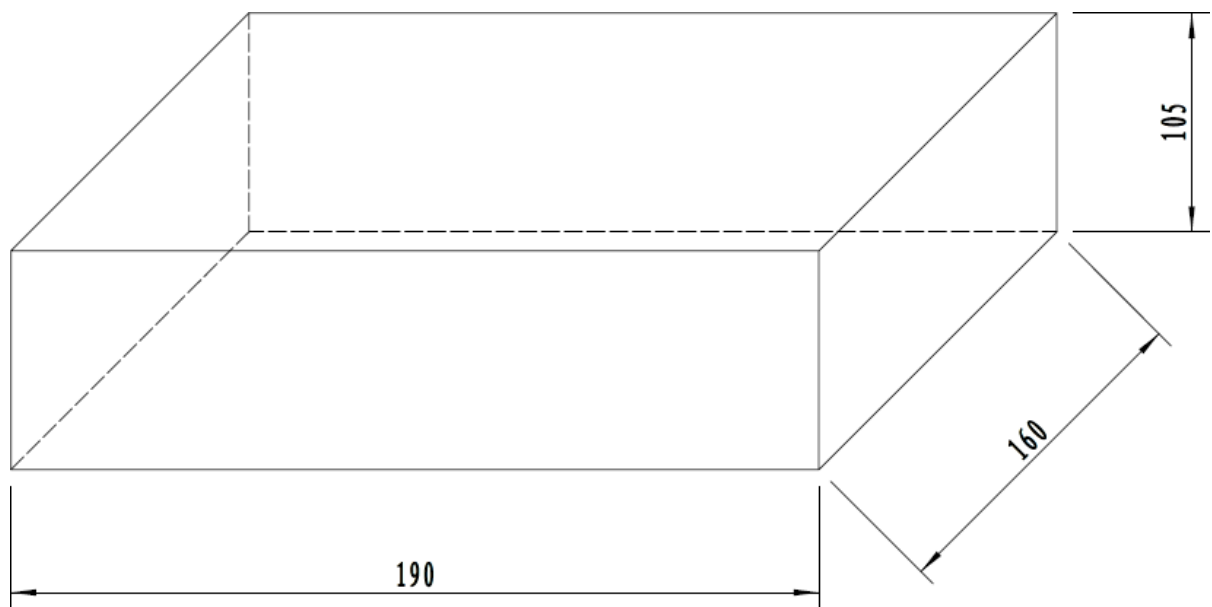


45 unites per box.

**7. Reliability characteristic:**

	Item	Condition	Specifications
7.1	Reflow Simulation	3X 240°C Peak 20 secs max above 240°C	$\Delta F \leq \pm 0.2 \text{ ppm}$
7.2	Power Cycle	100 Cycles -40°C, 30 minutes no power (off) and 30 minutes powered (on) -- Test product for functionality -- Continue for another 250 cycles -- Test product for functionality -- Intenal visual and mechanical inspection	$\Delta F \leq \pm 0.2 \text{ ppm}$
7.3	Thermal Shock	Subject samples to temperature extremes of -40 and +125C, 30 minute soaks at the temperature extremes, 10 seconds maximum transition time between extremes. The test duration is 10 Cycles GJB 360A-96 Method 107.	$\Delta F \leq \pm 0.2 \text{ ppm}$
7.4	Mechanical Shock	Shock 50g / 11 mS ½ sine IEC 68-2-27, test Ea, severity 50A	$\Delta F \leq \pm 0.2 \text{ ppm}$
7.5	Vibration	Vibration 10g -10Hz / 500Hz IEC 68-2-06, test Fc, severity 500/10	$\Delta F \leq \pm 0.2 \text{ ppm}$
7.6	Free drop	Drop from 10cm height on 3cm hard wooden board for 6 times  GB2423.8-1995 (idt IEC 68-2-32:1990) Method Ed.	$\Delta F \leq \pm 0.2 \text{ ppm}$
7.7	Aging	Bias oscillators at nominal voltage and subject oscillators to 25C for 1008 hours. Readings are to be taken with oscillator at 25C twice per day. Determine aging (frequency shift post 1008 hours minus initial frequency). Use the results to predict long-term aging.	Per. Spec.
7.8	Solderability	Precondition parts by steaming (over boiling water) for 8 hours OR age the parts at 150C for 16 hours	A new uniform coating of solder shall cover a minimum of 95% of the surface being immersed.

**8. All products are RoHs compliant**

### 9. Reflow Profile

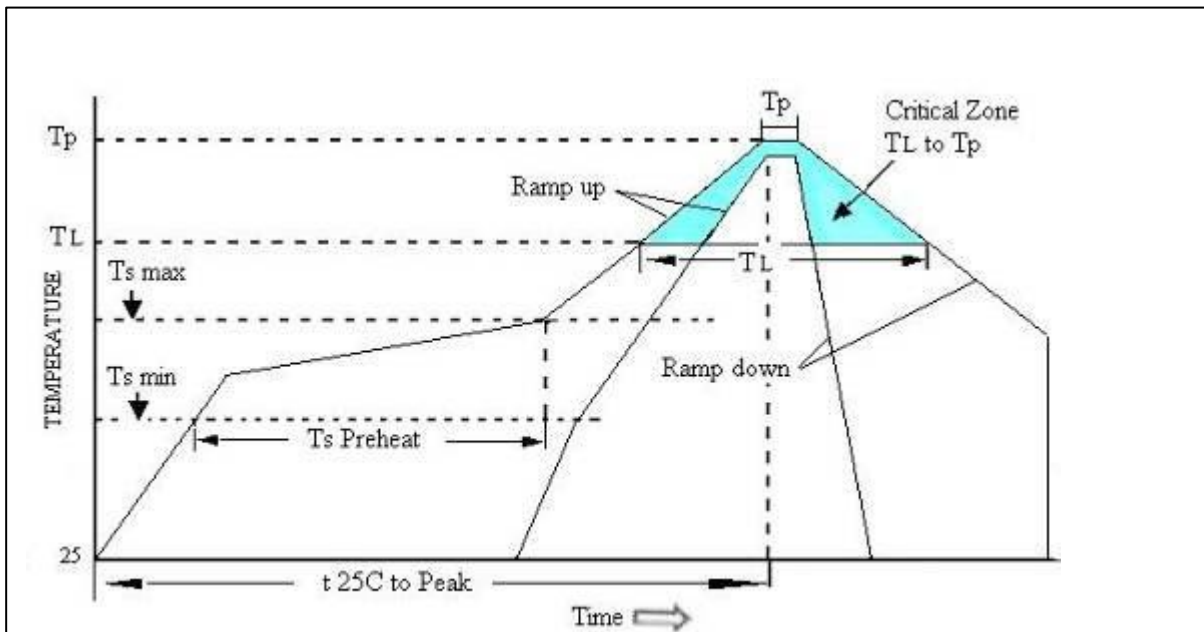

#### High Temperature Infrared /Convection

Note: Temperature shown are applied to body of device

Ts max to TL(Ramp-up Rate)	3°C/second max
Preheat	
Temperature Min(Ts Min)	150°C
Temperature Typical( Ts Typ)	175°C
Temperature Max.(Ts Max)	200°C
Time(ts)	60-180 seconds
Ram-up Rate(TL to Tp)	3°C/second Max
Time Maintained Above:	
--Temperature(TL)	217°C
--Time(TL)	60-150seconds
Peak Temperature (Tp)	260°C Max for 10 seconds
Time within 5°C of actual peak(tp)	20-40 seconds
Ramp-down Rate	6°C/seconds Max
Tune 25°C to Peak Temperature(t)	8 minutes Max
Moisture Sensitivity Level	Level 1

#### High Temperature Manual Soldering

Note: Temperature shown are applied to body of device

260°C Max for 5 seconds Max, 2 times Max