


# ES1A THRU ES1J

## SURFACE MOUNT SUPERFAST RECTIFIER VOLTAGE - 50 to 600 Volts CURRENT - 1.0 Ampere

### FEATURES

- For surface mounted applications
- Low profile package
- Built-in strain relief
- Easy pick and place
- Superfast recovery times for high efficiency
- Plastic package has Underwriters Laboratory Flammability Classification 94V-O
- Glass passivated junction
- High temperature soldering:  
260  $\text{C}$ /10 seconds at terminals

### SMA/DO-214AC

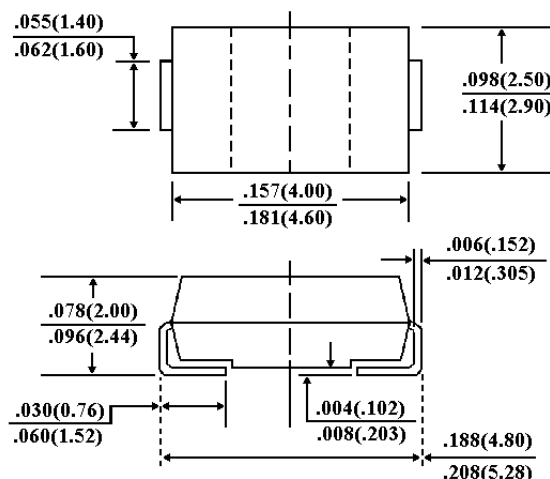

Dimensions in inches and (millimeters)

### MECHANICAL DATA

Case: JEDEC DO-214AC molded plastic

Terminals: Solder plated, solderable per  
MIL-STD-750, Method 2026

Polarity: Indicated by cathode band

Standard packaging: 12mm tape (EIA-481)

Weight: 0.002 ounce, 0.064 gram

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25  $\text{C}$  ambient temperature unless otherwise specified.

Single phase, half wave 60Hz resistive or inductive load.

For capacitive load, derate current by 20%.

	SYMBOLS	ES1A	ES1B	ES1C	ES1D	ES1E	ES1G	ES1J	UNITS
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	50	100	150	200	300	400	600	Volts
Maximum RMS Voltage	$V_{RMS}$	35	70	105	140	210	280	420	Volts
Maximum DC Blocking Voltage	$V_{DC}$	50	100	150	200	300	400	600	Volts
Maximum Average Forward Rectified Current, at $T_L=120 \text{ C}$	$I_{(AV)}$	1.0							Amps
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load(JEDEC method)	$I_{FSM}$	30.0							Amps
Maximum Instantaneous Forward Voltage at 1.0A	$V_F$	0.95			1.25		1.7		Volts
Maximum DC Reverse Current $T_A=25 \text{ C}$ At Rated DC Blocking Voltage $T_A=100 \text{ C}$	$I_R$				5.0				$\mu\text{g A}$
					100				
Maximum Reverse Recovery Time (Note 1)	$T_{RR}$				35.0				nS
Typical Junction capacitance (Note 2)	$C_J$				10.0				pF
Typical Thermal Resistance (Note 3)	$R_{\text{KJL}}$				35				$\text{C}/\text{W}$
Operating and Storage Temperature Range	$T_J, T_{STG}$				-50 to +150				$\text{C}$

### NOTES:

1. Reverse Recovery Test Conditions:  $I_F=0.5\text{A}$ ,  $I_R=1.0\text{A}$ ,  $I_{rr}=0.25\text{A}$
2. Measured at 1 MHz and Applied reverse voltage of 4.0 volts
3.  $8.0\text{mm}^2$  (.013mm thick) land areas

RATING AND CHARACTERISTIC CURVES

ES1A THRU ES1J

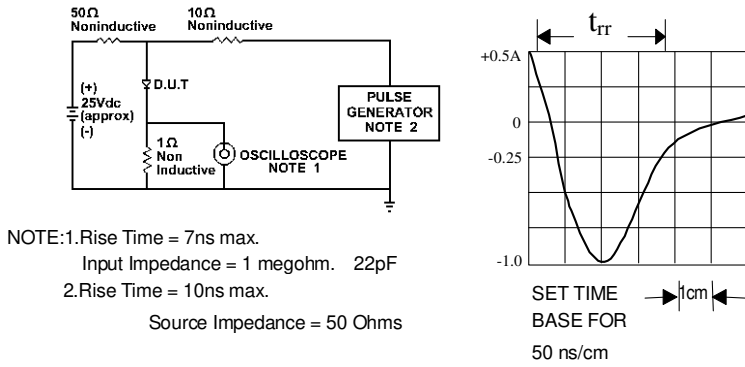


Fig. 1-REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

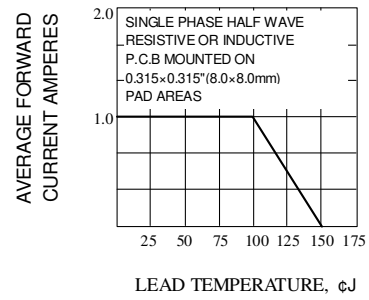


Fig. 2-MAXIMUM AVERAGE FORWARD CURRENT RATING

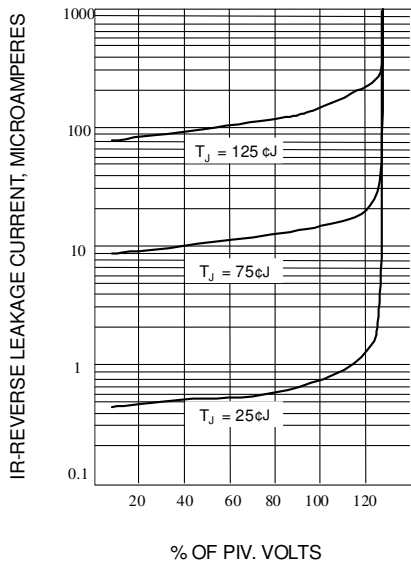


Fig. 3-TYPICAL REVERSE CHARACTERISTICS

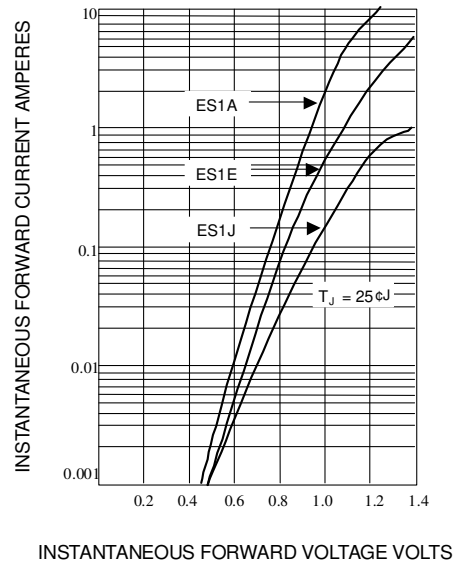


Fig. 4-TYPICAL FORWARD CHARACTERISTICS

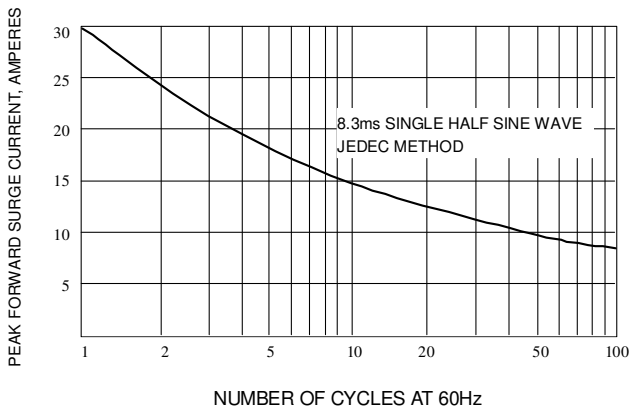


Fig. 5-MAXIMUM NON-REPETITIVE SURGE CURRENT

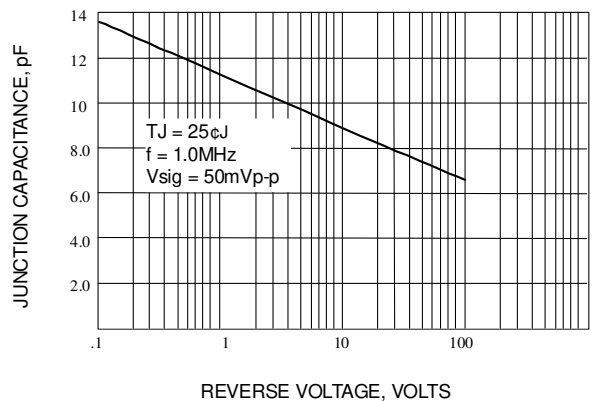


Fig. 6-TYPICAL JUNCTION CAPACITANCE

This datasheet has been download from:

[www.datasheetcatalog.com](http://www.datasheetcatalog.com)

Datasheets for electronics components.