


SMD Crystal Resonators / MHz Band Crystal Resonators

DSX321G

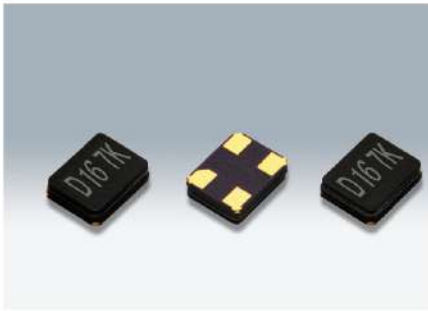

Actual size

■ Features

- 3225 size miniature and lightweight SMD crystal resonator.
Height DSX321G (over 12MHz): 0.75mm
Height DSX321G (under 12MHz): 0.85mm
- Excellent heat resistance, High precision and high reliability (Frequency aging specification of $\pm 1 \times 10^{-6}$ /1 year or $\pm 3 \times 10^{-6}$ /5 years is available for cell phone or wireless communication systems etc.)
- Offers a wide range of frequencies from 7.9MHz up to 64MHz.
- Moisture prevention packing is unnecessary.
Moisture Sensitivity Level: LEVEL 1 (IPC/JEDEC J-STD-033)
- AEC-Q200 Compliant
- Fully lead free option available.



RoHS Compliant

■ Applications

- Telecommunication products, short-range wireless modules and other small devices such as DVC, DSC, PDA, PC.
- Automotive applications such as Bluetooth, wireless LAN, GPS/GNSS, RKE (Remote Keyless Entry), safety controls and multimedia devices (AEC-Q200 Compliant)

■ Standard Specification

Item	Type	DSX321G						
Frequency Range		7.9 ~ 9MHz	9 ~ 9.8MHz	9.8 ~ 11MHz	11 ~ 12MHz	12 ~ 20MHz	20 ~ 27MHz	27 ~ 64MHz
Overtone Order		Fundamental						
Load Capacitance		8pF, 10pF, 12pF						
Drive Level		10 μ W (200 μ W max.)						
Frequency Tolerance		$\pm 20 \times 10^{-6}$ (at 25 $^{\circ}$ C)						
Series Resistance		400 Ω max.	300 Ω max.	150 Ω max.	100 Ω max.	80 Ω max.	60 Ω max.	50 Ω max.
Frequency Characteristics over Temperature		$\pm 30 \times 10^{-6}$ / -30 ~ +85 $^{\circ}$ C (Ref. to 25 $^{\circ}$ C)						
Storage Temperature Range		-40 ~ +85 $^{\circ}$ C						
Packing Unit		3000pcs./reel (ϕ 180)						

Consult our sales representative for other specifications.

■ DSX321G (under 12MHz)

[mm] ■ DSX321G (over 12MHz)

[mm]

■ Dimensions		■ Internal Connections	
■ Dimensions		■ Internal Connections	