

ISSUE 1; November 2017

### Description

- A quartz crystal in a ceramic package with a electron beam sealed metal lid.

### Frequency Parameters

- Frequency 36.0MHz to 80.0MHz
- Frequency Tolerance  $\pm 7.00\text{ppm}$  to  $\pm 100.00\text{ppm}$
- Frequency Stability  $\pm 10.00\text{ppm}$  to  $\pm 50.00\text{ppm}$

### Electrical Parameters

- Load Capacitance (CL) 10.0pF to 30.0pF
- Drive Level 100uW max
- Note1: ESR values are for reference only final specification shall be given after sample production.

### Operating Temperature Ranges

- -20 to 70°C
- -40 to 85°C

### Environmental Parameters


- Storage Temperature Range: -40 to 85°C

### Compliance


- RoHS Status (2011/65/EU) Compliant
- REACH Status Compliant
- MSL Rating (JDEC-STD-033): Not Applicable

### Packaging Details

- Pack Style: Cutt Cut tape  
Pack Size: 100
- Pack Style: Reel Tape & reel in accordance with EIA-481D  
Pack Size: 3,000

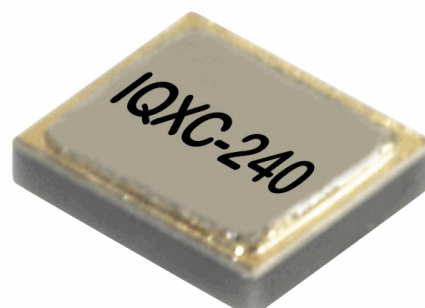

### Outline (mm)

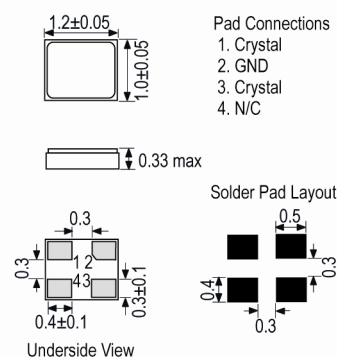

### Sales Office Contact Details:

UK: +44 (0)1460 270200  
Germany: 0800 1808 443

France: 0800 901 383  
USA: +1.760.318.2824

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)  
Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)

Electrical Specification - maximum limiting values

Frequency Min	Frequency Max	Temperature Range	Stability (Min)	Over Tone Order	ESR (Note 1)
		°C	ppm		Ω
36.0MHz	40.0MHz	-20 to 70 -40 to 85	±10 ±15	Fundamental	150
40.000001MHz	48.0MHz	-20 to 70 -40 to 85	±10 ±15	Fundamental	80
48.000001MHz	80.0MHz	-20 to 70 -40 to 85	±10 ±15	Fundamental	60

\*Stability Maximum values ±50ppm

This document was correct at the time of printing; please contact your local sales office for the latest version.

[Click to view latest version on our website.](#)

**Sales Office Contact Details:**

UK: +44 (0)1460 270200  
Germany: 0800 1808 443

France: 0800 901 383  
USA: +1.760.318.2824

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)  
Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)